

Constant voltage linear dimmable driver

DGV Series suffix D(DALI-2+pushDIM+1-10V/10V PWM/Rx+12V)



Features

- Support DALI-2/pushDIM+1-10V/10V PWM/Rx dimming +12V auxiliary power
- Provide 12V 100mA auxiliary power supply to power control module or sensor
- Soft dimming and flicker-free at any brightness
- Dimming range 1~100%,support multiple lights dimming
- Standby power input<0.5W, meets the requirements of ErP certification
- High PF, high efficiency, low THD
- SELV and Class I design, suitable for use inside of the luminaires
- Compliance with CE, ENEC, UKCA, RCM, DALI-2 and other certifications
- IP20 protection grade, indoor use
- Nominal life-time up to 100,000 h
- 5.5-year guarantee

Interfaces

- DALI-2(DALI-2 DT6)
- PUSH(pushDIM)
- 1-10V 3in1(1-10V / 10V PWM/Rx)
- VCC Auxiliary power(12V,100mA)

Functions

- Support self-contained emergency application
- Protective features
(short-circuit, overload protection)


Suitable for lights

- Suitable for CV strip lights, CV linear lights, floor lights, three-proof lights, bracket lights, etc

Typical applications

- LED indoor lighting
- LED office lighting
- LED commercial lighting

Model coding rules of DGV series

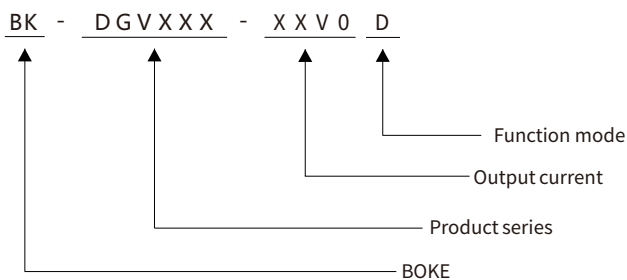

Function list

Model	Suffix	Wired dimming			Aux power
		DALI-2	pushDIM	1-10V 3in1	12V/0.1A
BK-DGV036 BK-DGV060 BK-DGV100 BK-DGV150	D	√	√	√	√

Model list

Model	Input voltage	Output power	Output voltage	Output current	Dimension
BK-DGV036-24V0D	200-240VAC	36W MAX.	24VDC	1.5A	L245*W30*H21mm
BK-DGV036-48V0D	200-240VAC	36W MAX.	48VDC	0.75A	L245*W30*H21mm
BK-DGV060-24V0D	200-240VAC	60W MAX.	24VDC	2.5A	L285*W30*H21mm
BK-DGV060-48V0D	200-240VAC	57.6W MAX.	48VDC	1.2A	L285*W30*H21mm
BK-DGV100-24V0D	200-240VAC	100W MAX.	24VDC	4.2A	L355*W30*H21mm
BK-DGV100-48V0D	200-240VAC	100W MAX.	48VDC	2.09A	L355*W30*H21mm
BK-DGV150-24V0D	200-240VAC	150W MAX.	24VDC	6.25A	L355*W36*H23mm
BK-DGV150-48V0D	200-240VAC	150W MAX.	48VDC	3.12A	L355*W36*H23mm

Technical data

Product model	BK-DGV036-24V0D	BK-DGV036-48V0D	
Output parameters			
Regulation method	Constant voltage	Constant voltage	
Rated output current	1.5A	0.75A	
Rated output voltage	24V	48V	
Rated output power	36W Max	36W Max	
Output voltage adjustment	Fixed output	Fixed output	
Output current ripple LF	± 2%	± 2%	
Voltage accuracy	± 4%	± 4%	
Linear regulation	± 4%	± 4%	
Load regulation	± 4%	± 4%	
Flicker-free(typical)	Pst LM=0.002, SVM=0.000,(The above parameters are obtained by testing with constant voltage light strip)		
Input parameters			
Rated input voltage range	200-240VAC		
Input voltage range	180-264VAC		
Input votage shock	<380 V AC		
Input current	<0.25A (AC 200V)		
Input frequency	50/60Hz		
Input PF/Input DF(typical)	PF: 0.98,DF: 0.99,see the electrical values below for details		
Input THD(typical)	7%,see the electrical values below for details		
Efficiency(typical)	88.5% (230V AC & Full load),see the electrical values below for details		
In-rush current(typical)	16.25A peak ,260us duration(50 % Ipeak), see the description below for details		
Start/Switchover/Turn off	<0.7s(AC start),<0.7s(DC start),<0.3s(AC/DC switchover),<0.5s(Turn off)		
Switching cycles	> 100,000 switching cycles		
Power consumption(typical)	Full load(Pin):40.7W, No load(Pno): N/A, On stand-by(Psb) : <0.5W, Network stand-by(Pnet) : N/A		
Safety			
Withstand voltage	I/P-O/P(LED):3750VAC,I/P-FG:1750VAC,O/P-FG:500VAC,I/P-DALI: 1500VAC,O/P-DALI: 1500VAC		
Mains surge capability	L-N:2KV,L-FG/N-FG:2KV(90°/270°, 5 times each with an interval of 60s)(Performance criterion:A)		
Leakage current(typical)	0.48mA		
Isolation resistance	I/P-O/P:100MΩ/500Vdc/25°C/70% RH		
Control interface			
DALI dimming port	Voltage range: DC9.5-22.5V, typical 16V, interface current consumption: 1.8mA		
pushDIM dimming port	Voltage range: AC180-264V 50/60Hz		
1-10V 3in1 dimming port	Voltage range: DC0-15V, maximum output current ≤0.75mA		
Auxiliary power supply	DC12V ±5% 100mA		
Dimming range	1-100%		
Dimming drive mode	H-PWM		
Emergency support			
Central emergency system	Not supported		
Self-contained emergency	Supported		
Environment & Life time			
Operating temperature	Ta=-20-60°C		
Case temperature	Tc=90°C		
Operating humidity	5-85% RH, not condensing		
Storage temp./humidity	-40-80°C, 5-85% RH, not condensing		
IP grade	IP20		
MTBF	500,000H,MIL-HDBK-217F(25°C)		
Life-time	Nominal life-time up to 100,000 h, see the description below for details		
Vibration resistant	10~500Hz,5G 12min./1cycle,period for 72min. each along X,Y,Z axes		
Acoustic Noise	<25dB(30cm, Normal operation)		
Environmental protection	RoHS		
Certifications and standards			
Compliance certification	CE, ENEC, UKCA, RCM, DALI-2, CCC		
Safety	GB/T 19510.1, GB/T 19510.213, EN61347-1, EN61347-2-13, EN62384		
EMC	GB/T 17743 , GB17625.1, EN55015, EN61000-3-2 , EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547		
DALI-2	IEC 62386-101(DALI-2), IEC 62386-102(DALI-2), IEC 62386-207(DALI-2)		
EL	N/A		
RF	N/A		

Remarks

- 1.By default, all parameter are measured at 230VAC input, 50Hz, full load and 25°C of ambient temperature.
- 2.The LED lamp load is a constant-voltage load.

Technical data

Product model	BK-DGV060-24V0D	BK-DGV060-48V0D	
Output parameters			
Regulation method	Constant voltage	Constant voltage	
Rated output current	2.5A	1.2A	
Rated output voltage	24V	48V	
Rated output power	60W Max	57.6W Max	
Output voltage adjustment	Fixed output	Fixed output	
Output current ripple LF	± 2%	± 2%	
Voltage accuracy	± 4%	± 4%	
Linear regulation	± 4%	± 4%	
Load regulation	± 4%	± 4%	
Flicker-free(typical)	Pst LM=0.176, SVM=0.000,(The above parameters are obtained by testing with constant voltage light strip)		
Input parameters			
Rated input voltage range	200-240VAC		
Input voltage range	180-264VAC		
Input votage shock	<380 V AC		
Input current	<0.35A (AC200V)		
Input frequency	50/60Hz		
Input PF/Input DF(typical)	PF: 0.98,DF: 0.99,see the electrical values below for details		
Input THD(typical)	7%,see the electrical values below for details		
Efficiency(typical)	90% (230V AC & Full load),see the electrical values below for details		
In-rush current(typical)	34A peak ,260us duration(50 % Ipeak), see the description below for details		
Start/Switchover/Turn off	<0.7s(AC start),<0.7s(DC start),<0.3s(AC/DC switchover),<0.5s(Turn off)		
Switching cycles	> 100,000 switching cycles		
Power consumption(typical)	Full load(Pin):66.7W, No load(Pno): N/A, On stand-by(Psb) : <0.5W, Network stand-by(Pnet) : N/A		
Safety			
Withstand voltage	I/P-O/P(LED):3750VAC,I/P-FG:1750VAC,O/P-FG:500VAC,I/P-DALI: 1500VAC,O/P-DALI: 1500VAC		
Mains surge capability	L-N:2KV,L-FG/N-FG:2KV(90°/270°, 5 times each with an interval of 60s)(Performance criterion:A)		
Leakage current(typical)	0.46mA		
Isolation resistance	I/P-O/P:100MΩ/500Vdc/25°C/70% RH		
Control interface			
DALI dimming port	Voltage range: DC9.5-22.5V, typical 16V, interface current consumption: 1.8mA		
pushDIM dimming port	Voltage range: AC180-264V 50/60Hz		
1-10V 3in1 dimming port	Voltage range: DC0-15V, maximum output current ≤0.75mA		
Auxiliary power supply	DC12V ± 5% 100mA		
Dimming range	1-100%		
Dimming drive mode	H-PWM		
Emergency support			
Central emergency system	Not supported		
Self-contained emergency	Supported		
Environment & Life time			
Operating temperature	Ta=-20-60°C		
Case temperature	Tc=90°C		
Operating humidity	5-85% RH, not condensing		
Storage temp./humidity	-40-80°C, 5-85% RH, not condensing		
IP grade	IP20		
MTBF	500,000H,MIL-HDBK-217F(25°C)		
Life-time	Nominal life-time up to 100,000 h, see the description below for details		
Vibration resistant	10~500Hz,5G 12min./1cycle,period for 72min. each along X,Y,Z axes		
Acoustic Noise	<25dB(30cm, Normal operation)		
Environmental protection	RoHS		
Certifications and standards			
Compliance certification	CE, ENEC, UKCA, RCM, DALI-2, CCC		
Safety	GB/T 19510.1, GB/T 19510.213, EN61347-1, EN61347-2-13, EN62384		
EMC	GB/T 17743 , GB17625.1, EN55015, EN61000-3-2 , EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547		
DALI-2	IEC 62386-101(DALI-2), IEC 62386-102(DALI-2), IEC 62386-207(DALI-2)		
EL	N/A		
RF	N/A		

Remarks

- 1.By default, all parameter are measured at 230VAC input, 50Hz, full load and 25°C of ambient temperature.
- 2.The LED lamp load is a constant-voltage load.

Technical data

Product model	BK-DGV100-24V0D	BK-DGV100-48V0D	
Output parameters			
Regulation method	Constant voltage	Constant voltage	
Rated output current	4.2A	2.09A	
Rated output voltage	24V	48V	
Rated output power	100W Max	100W Max	
Output voltage adjustment	Fixed output	Fixed output	
Output current ripple LF	± 2%	± 2%	
Voltage accuracy	± 4%	± 4%	
Linear regulation	± 4%	± 4%	
Load regulation	± 4%	± 4%	
Flicker-free(typical)	Pst LM=0.065, SVM=0.015,(The above parameters are obtained by testing with constant voltage light strip)		
Input parameters			
Rated input voltage range	200-240VAC		
Input voltage range	180-264VAC		
Input votage shock	<300 V AC		
Input current	<0.65A (AC 200V)		
Input frequency	50/60Hz		
Input PF/Input DF(typical)	PF: 0.99,DF: 0.99,see the electrical values below for details		
Input THD(typical)	5%,see the electrical values below for details		
Efficiency(typical)	92% (230V AC & Full load),see the electrical values below for details		
In-rush current(typical)	46.38A peak ,278us duration(50 % Ipeak), see the description below for details		
Start/Switchover/Turn off	<0.7s(AC start),<0.7s(DC start),<0.3s(AC/DC switchover),<0.5s(Turn off)		
Switching cycles	> 100,000 switching cycles		
Power consumption(typical)	Full load(Pin):108.7W, No load(Pno): N/A, On stand-by(Psb) : <0.5W, Network stand-by(Pnet) : N/A		
Safety			
Withstand voltage	I/P-O/P(LED):3750VAC,I/P-FG:1750VAC,O/P-FG:500VAC,I/P-DALI: 1500VAC,O/P-DALI: 1500VAC		
Mains surge capability	L-N:2KV,L-FG/N-FG:2KV(90°/270°, 5 times each with an interval of 60s)(Performance criterion:B)		
Leakage current(typical)	0.45mA		
Isolation resistance	I/P-O/P:100MΩ/500Vdc/25°C/70% RH		
Control interface			
DALI dimming port	Voltage range: DC9.5-22.5V, typical 16V, interface current consumption: 1.8mA		
pushDIM dimming port	Voltage range: AC180-264V 50/60Hz		
1-10V 3in1 dimming port	Voltage range: DC0-15V, maximum output current ≤0.75mA		
Auxiliary power supply	DC12V ±5% 100mA		
Dimming range	1-100%		
Dimming drive mode	H-PWM		
Emergency support			
Central emergency system	Not supported		
Self-contained emergency	Supported		
Environment & Life time			
Operating temperature	Ta=-20-60°C		
Case temperature	Tc=95°C		
Operating humidity	5-85% RH, not condensing		
Storage temp./humidity	-40-80°C, 5-85% RH, not condensing		
IP grade	IP20		
MTBF	500,000H,MIL-HDBK-217F(25°C)		
Life-time	Nominal life-time up to 100,000 h, see the description below for details		
Vibration resistant	10~500Hz,5G 12min./1cycle,period for 72min. each along X,Y,Z axes		
Acoustic Noise	<25dB(30cm, Normal operation)		
Environmental protection	RoHS		
Certifications and standards			
Compliance certification	CE, ENEC, UKCA, RCM, DALI-2, CCC		
Safety	GB/T 19510.1, GB/T 19510.213, EN61347-1, EN61347-2-13, EN62384		
EMC	GB/T 17743 , GB17625.1, EN55015, EN61000-3-2 , EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547		
DALI-2	IEC 62386-101(DALI-2), IEC 62386-102(DALI-2), IEC 62386-207(DALI-2)		
EL	N/A		
RF	N/A		

Remarks

- 1.By default, all parameter are measured at 230VAC input, 50Hz, full load and 25°C of ambient temperature.
- 2.The LED lamp load is a constant-voltage load.

Technical data

Product model	BK-DGV150-24V0D	BK-DGV150-48V0D	
Output parameters			
Regulation method	Constant voltage	Constant voltage	
Rated output current	6.25A	3.12A	
Rated output voltage	24V	48V	
Rated output power	150W Max	150W Max	
Output voltage adjustment	Fixed output	Fixed output	
Output current ripple LF	±2%	±2%	
Voltage accuracy	±4%	±4%	
Linear regulation	±4%	±4%	
Load regulation	±4%	±4%	
Flicker-free(typical)	Pst LM=0.018, SVM=0.000,(The above parameters are obtained by testing with constant voltage light strip)		
Input parameters			
Rated input voltage range	200-240VAC		
Input voltage range	180-264VAC		
Input votage shock	<300 V AC		
Input current	<1A (AC 200V)		
Input frequency	50/60Hz		
Input PF/Input DF(typical)	PF: 0.99,DF: 0.99,see the electrical values below for details		
Input THD(typical)	5%,see the electrical values below for details		
Efficiency(typical)	92% (230V AC & Full load),see the electrical values below for details		
In-rush current(typical)	50A peak ,468us duration(50 % Ipeak), see the description below for details		
Start/Switchover/Turn off	<0.7s(AC start),<0.7s(DC start),<0.3s(AC/DC switchover),<0.5s(Turn off)		
Switching cycles	> 100,000 switching cycles		
Power consumption(typical)	Full load(Pin):162.2W, No load(Pno): N/A, On stand-by(Psb) : <0.5W, Network stand-by(Pnet) : N/A		
Safety			
Withstand voltage	I/P-O/P(LED):3750VAC,I/P-FG:1750VAC,O/P-FG:500VAC,I/P-DALI: 1500VAC,O/P-DALI: 1500VAC		
Mains surge capability	L-N:2KV,L-FG/N-FG:2KV(90°/270°, 5 times each with an interval of 60s)(Performance criterion:B)		
Leakage current(typical)	0.38mA		
Isolation resistance	I/P-O/P:100MΩ/500Vdc/25°C/70% RH		
Control interface			
DALI dimming port	Voltage range: DC9.5-22.5V, typical 16V, interface current consumption: 1.8mA		
pushDIM dimming port	Voltage range: AC180-264V 50/60Hz		
1-10V 3in1 dimming port	Voltage range: DC0-15V, maximum output current ≤0.75mA		
Auxiliary power supply	DC12V ±5% 100mA		
Dimming range	1-100%		
Dimming drive mode	H-PWM		
Emergency support			
Central emergency system	Not supported		
Self-contained emergency	Supported		
Environment & Life time			
Operating temperature	Ta=-20-60°C		
Case temperature	Tc=90°C		
Operating humidity	5-85% RH, not condensing		
Storage temp./humidity	-40-80°C, 5-85% RH, not condensing		
IP grade	IP20		
MTBF	500,000H,MIL-HDBK-217F(25°C)		
Life-time	Nominal life-time up to 100,000 h, see the description below for details		
Vibration resistant	10~500Hz,5G 12min./1cycle,period for 72min. each along X,Y,Z axes		
Acoustic Noise	<25dB(30cm, Normal operation)		
Environmental protection	RoHS		
Certifications and standards			
Compliance certification	CE, ENEC, UKCA, RCM, DALI-2, CCC		
Safety	GB/T 19510.1, GB/T 19510.213, EN61347-1, EN61347-2-13, EN62384		
EMC	GB/T 17743, GB17625.1, EN55015, EN61000-3-2 , EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547		
DALI-2	IEC 62386-101(DALI-2), IEC 62386-102(DALI-2), IEC 62386-207(DALI-2)		
EL	N/A		
RF	N/A		


Remarks

- 1.By default, all parameter are measured at 230VAC input, 50Hz, full load and 25°C of ambient temperature.
- 2.The LED lamp load is a constant-voltage load.


Electrical values

BK-DGV036-24V0D


Efficiency vs load

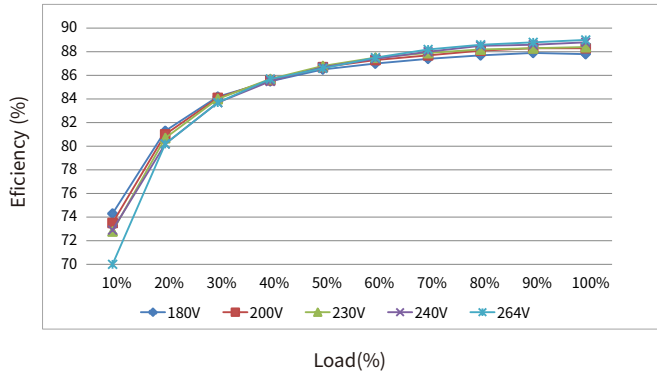


THD vs. Load

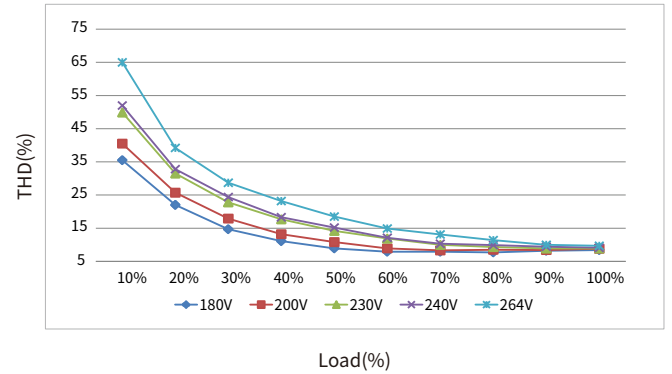

Power factor vs. Load

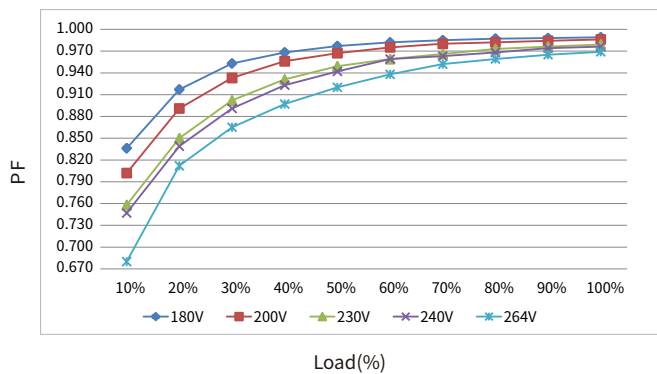


displacement power vs. Load

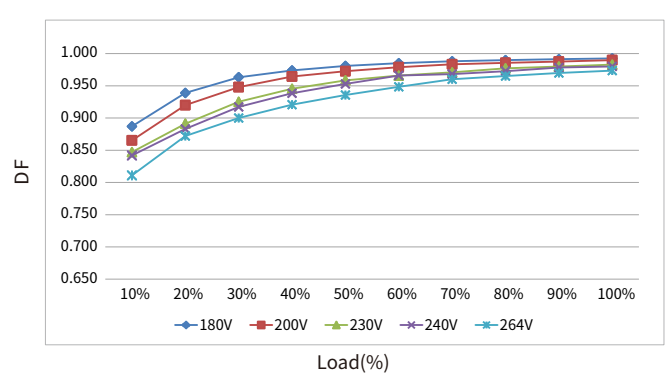


BK-DGV036-48V0D


Efficiency vs load

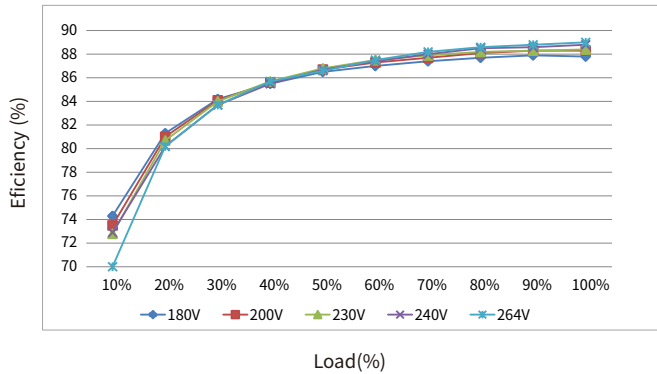


THD vs. Load

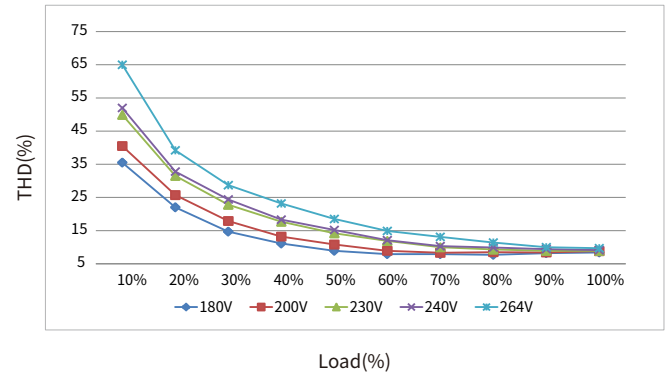

Power factor vs. Load

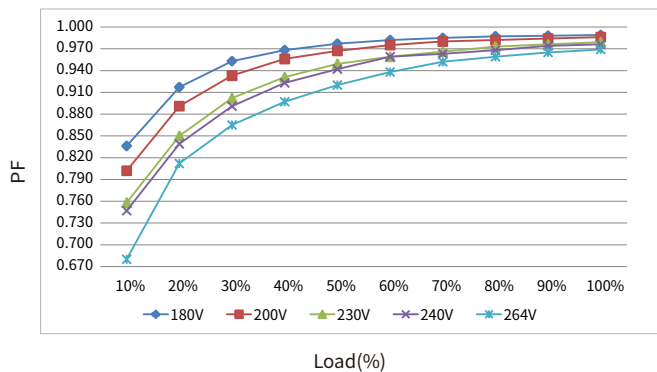


displacement power vs. Load

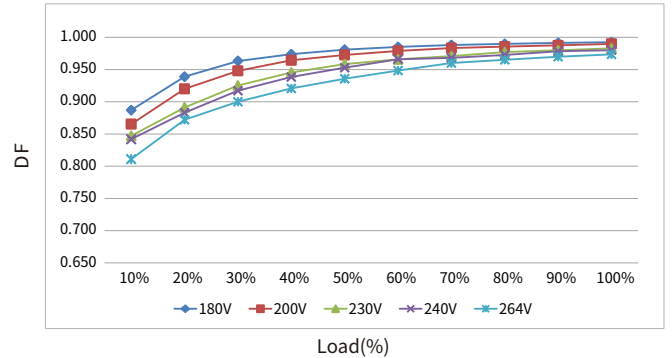


Electrical values

BK-DGV060-24V0D


Efficiency vs load

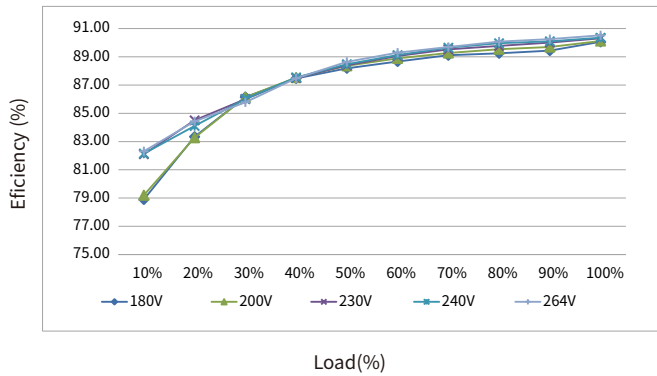


THD vs. Load

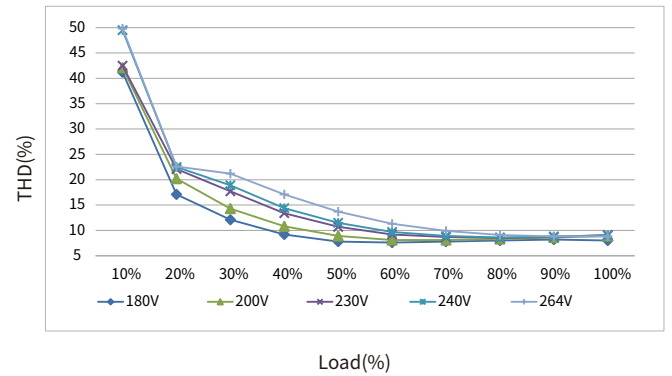

Power factor vs. Load

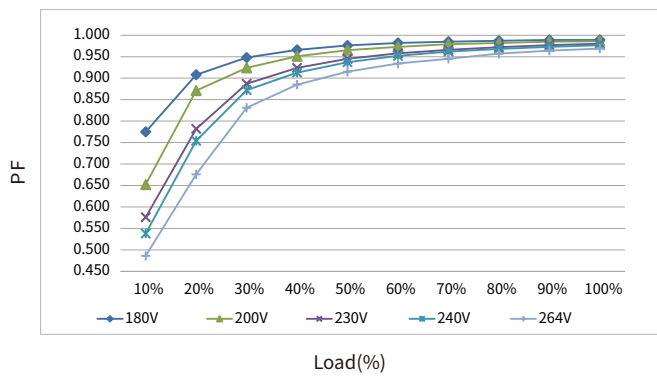


displacement power vs. Load

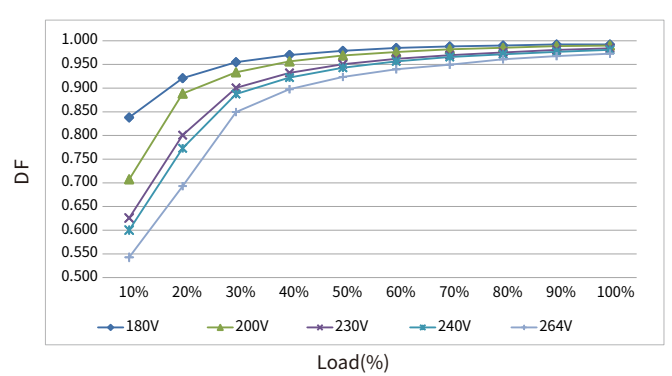


BK-DGV060-48V0D


Efficiency vs load

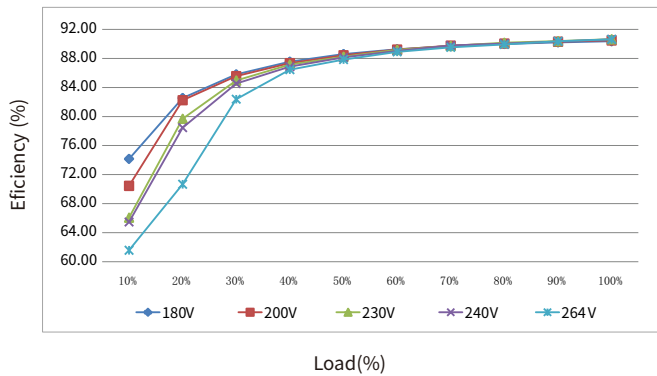


THD vs. Load

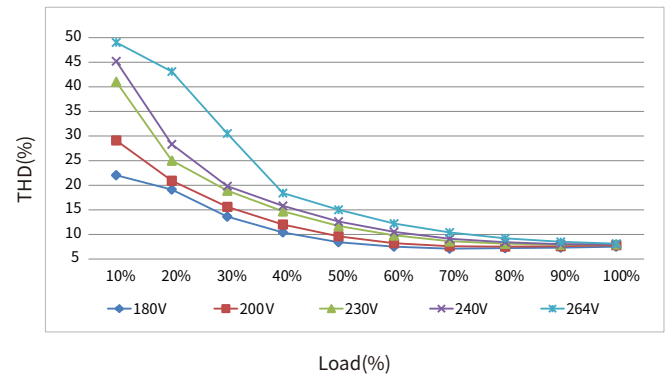

Power factor vs. Load

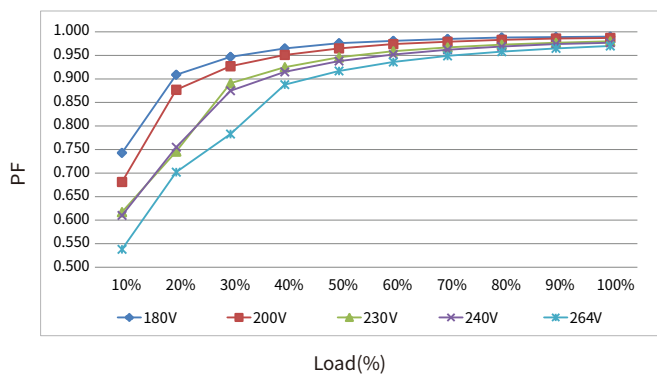


displacement power vs. Load

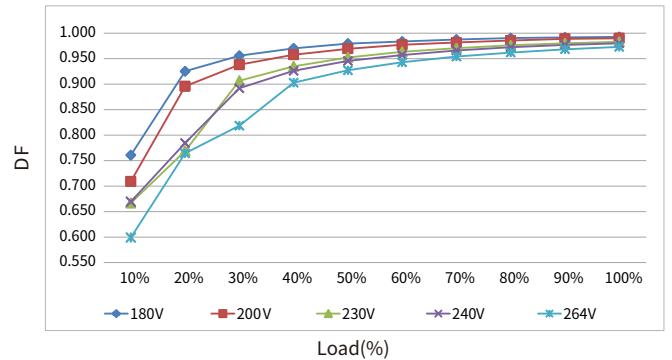


Electrical values

BK-DGV100-24V0D


Efficiency vs load

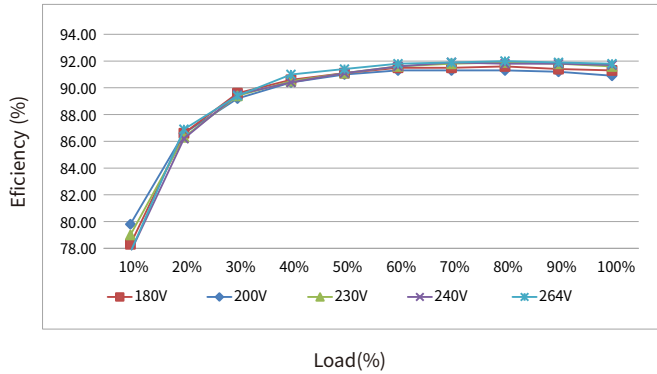


THD vs. Load

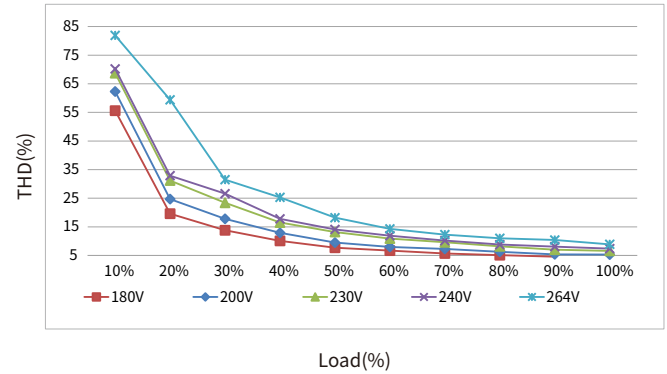

Power factor vs. Load

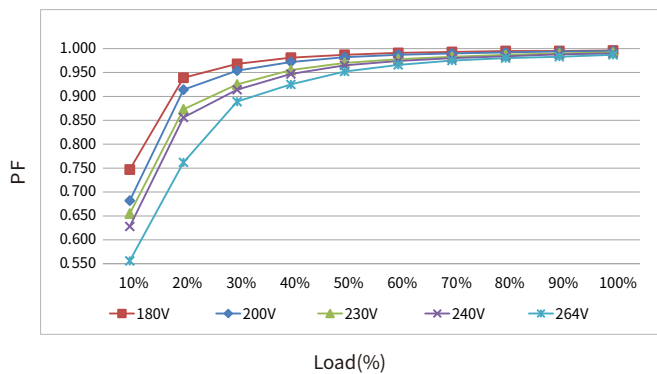


displacement power vs. Load

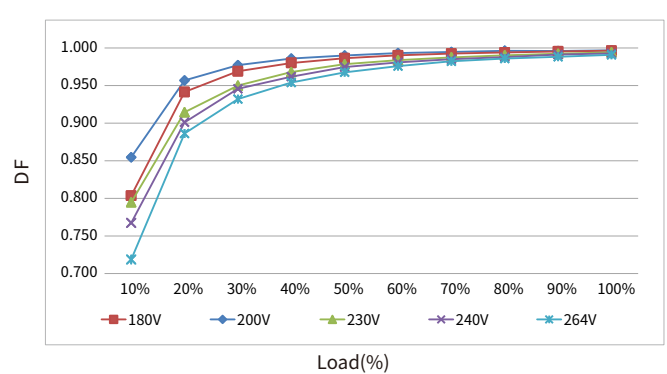


BK-DGV100-48V0D


Efficiency vs load

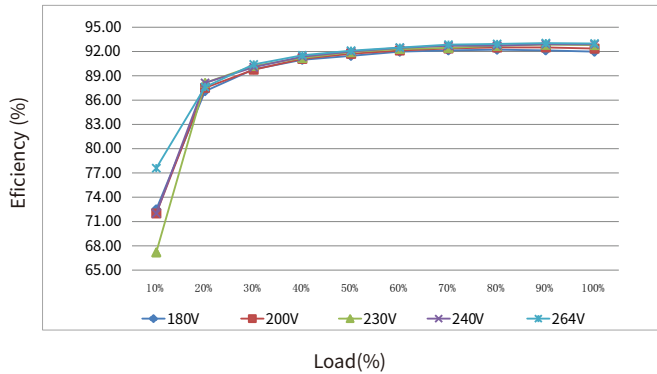


THD vs. Load

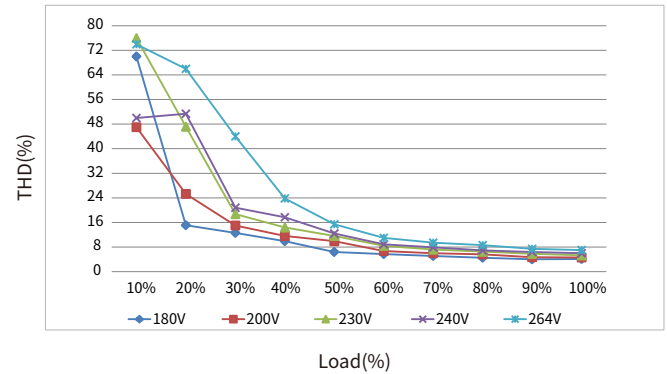

Power factor vs. Load

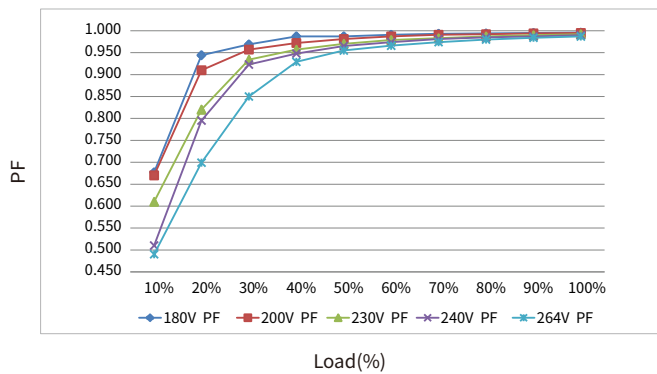


displacement power vs. Load

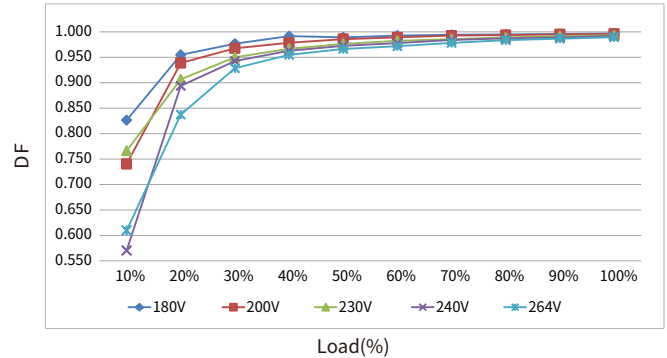


Electrical values

BK-DGV150-24V0D


Efficiency vs load

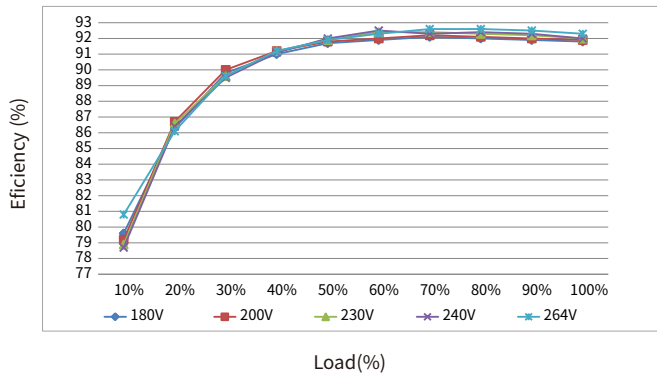


THD vs. Load

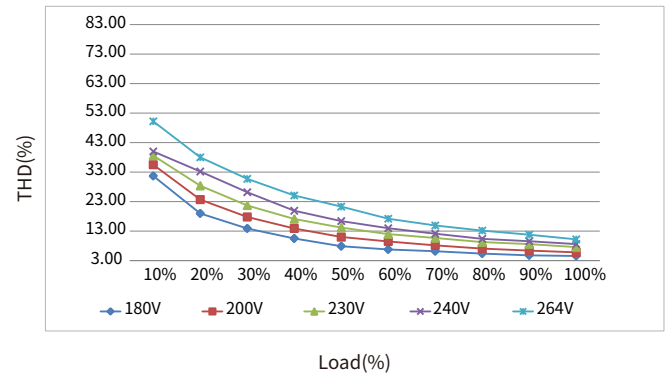

Power factor vs. Load

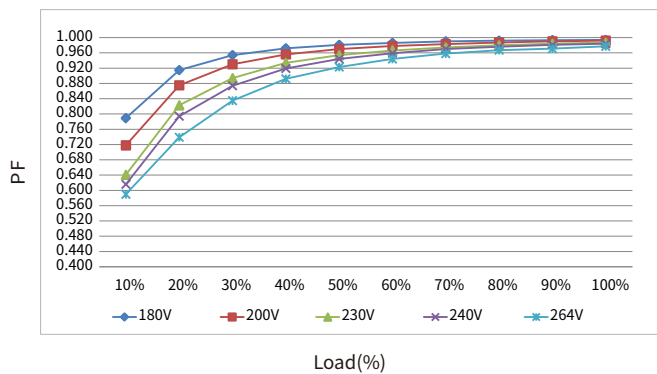


displacement power vs. Load

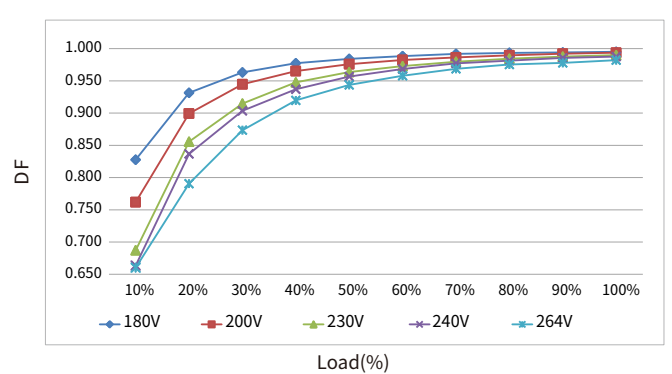


BK-DGV150-48V0D


Efficiency vs load

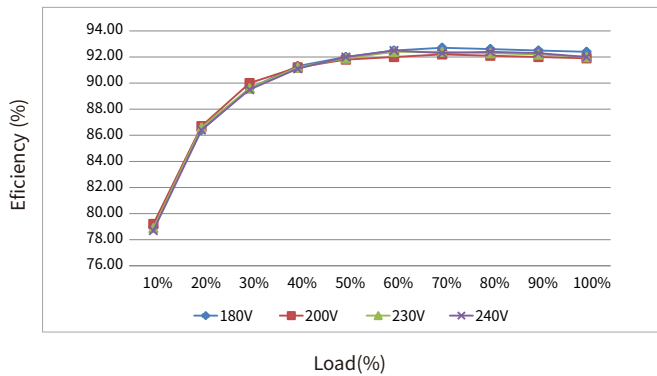


THD vs. Load

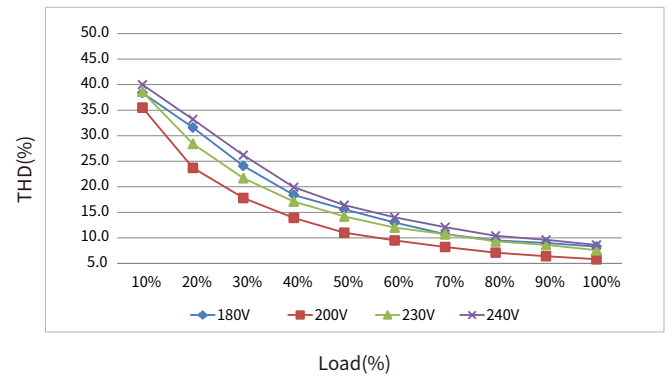

Power factor vs. Load

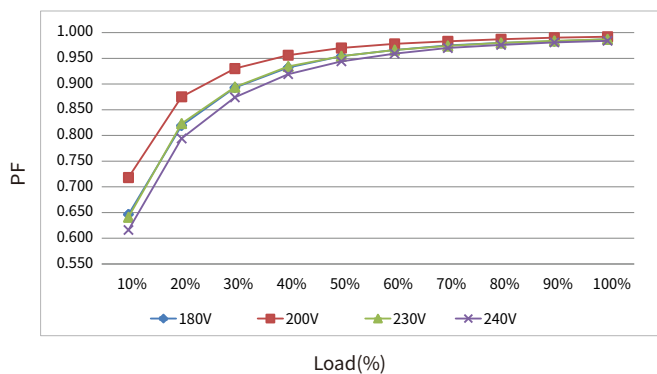


displacement power vs. Load

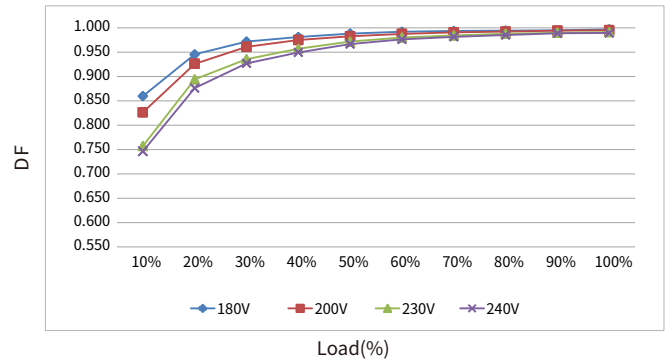

Expected life-time


BK-DGV036

Life-time vs. case temperature

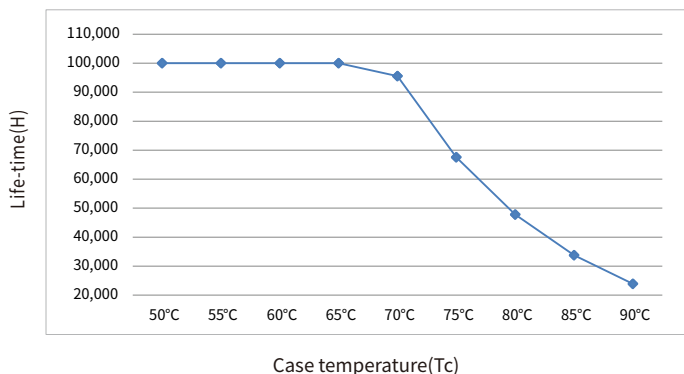


BK-DGV060

Life-time vs. case temperature

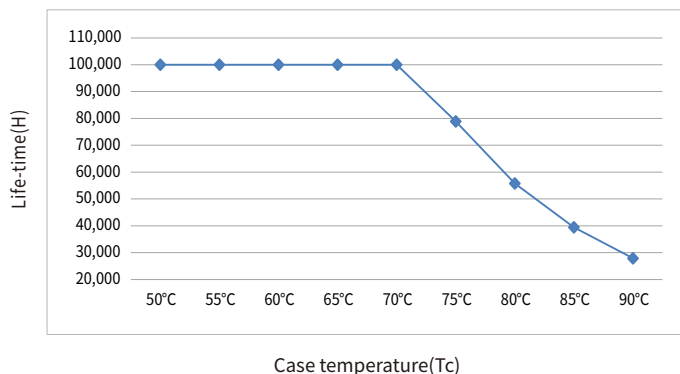


BK-DGV100

Life-time vs. case temperature

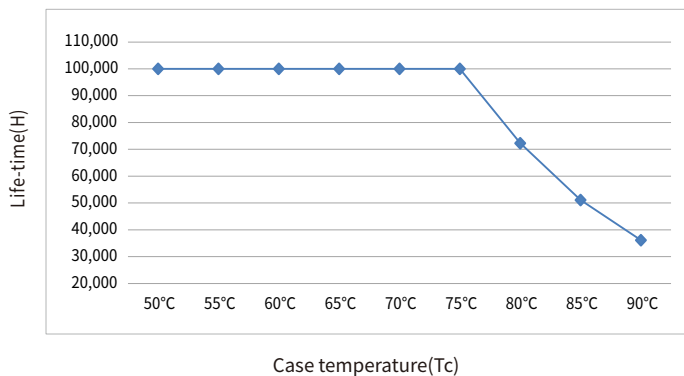

BK-DGV150


Life-time vs. case temperature

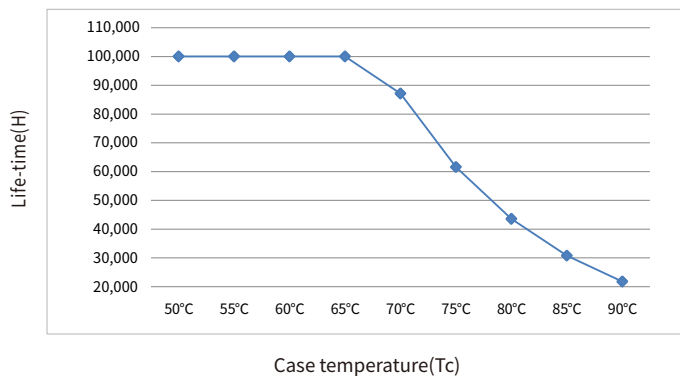

- The life-time of the LED driver is shown in the figure above (calculated based on the 90% survival rate).
- The relation of tc to ta temperature depends also on the luminaire design.

Surge

Model	Ipeak	Twidth	Condition	Relative number of MCB/pcs														
				B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20	D25
BK-DGV036	16.25A	260us	AC 230V,Full load, Cold start,Ta≤30°C, MCB is not installed side by side	14	18	23	28	36	24	31	38	47	59	38	50	61	76	95
BK-DGV060	34A	260us		7	9	11	14	17	11	15	18	23	28	23	29	36	45	57
BK-DGV100	46.38A	278us		4	6	7	9	11	7	9	12	14	18	14	19	23	29	36
BK-DGV150	50A	468us		2	3	4	5	6	4	5	6	8	9	8	10	12	15	19

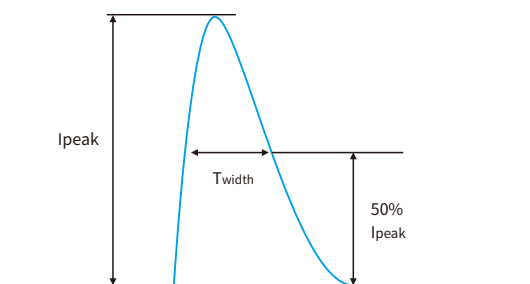

Remarks

- The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
- Calculation uses typical values from ABB series S200 as a reference.
- Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.
- If the ambient temperature of the MCB installation exceeds 30°C or multiple MCBs are installed side by side, the number of drives mounted will be reduced and the calculation needs to be recalculated.
- Electrician's usually consider Type B for household lighting and Type C for commercial lighting application.

Functions

Output short-circuit protection

- When the output of the driver is short-circuited, the driver will enter the protection state, disconnect the AC for more than 1 minute, and the output will return to normal.

Output overload protection

- When the load connected to the driver exceeds the rated power, the driver will enter a hiccup state. After reducing the load power, the driver will resume normal output.

Insulation between circuits

Isolation	Input	Output	Case	DALI	PUSH	PWM	VCC
Input	-	Double	Basic	Basic	-	Double	Double
Output	Double	-	Basic	Basic	Double	-	-
Case	Basic	Basic	-	Basic	Basic	Basic	Basic

Label

DGV036

INPUT ☐ ACL ☐ ACN ☐ DA ☐ DA ☐ DA ☐ ⑤	BOKE Dimmable Constant Voltage LED Driver MODEL: BK-DGV036-24V0D INPUT: 200-240V ~ 0.25A Max. 50/60Hz λ: 0.95 OUTPUT: 24V ~ 1.5A 36W Max. For LED modules only www.bokedriver.com MADE IN CHINA	 -25°C to +25°C -40°C to +60°C BOKE Drivers Co., Ltd. Address: 2nd and 3rd Floor, No. 51, Jiluan 5th Road, South District, 254652, Zhongshan City, Guangdong, China	OUTPUT SEC wire pin 1 ☐ V+ ☐ V- SEC wire pin 2 ☐ VCC0 ☐ GND0 SEC wire pin 3 ☐ DIM+ ☐ DIM-
---	---	--	---

INPUT ☐ ACL ☐ ACN ☒ DA push button ON/OFF ☐ DA PWM input pin @ 1% ~ 5msec 	E_KOKE Dimmable Constant Voltage LED Driver MODEL: BK-DGVO36-48V0D INPUT: 200-240V ~ 0.25A 50/60Hz /x: 0.95 OUTPUT: 48V ~ 0.75A 36W MAX. For LED modules use only www.bokedriver.com MADE IN CHINA	 tc: 60°C tc M ta: 90°C FREE BOKO Drivers Co., Ltd. Address: 2nd and 3rd Floor, No. S1, Xihuan 5th Road, South District, 528455 Zhongshan City, Guangdong, CHINA	OUTPUT LED max power @ 100°C ☐ V+ ☐ V- VCC=12V 1.2W MAX. GND=0V ☐ VCC ☐ GND ☐ DIM O
---	---	---	--

DGV060

INPUT

- ACL
- ACN
- DA
- DA
- DA
- DA

push 1mm
0.75-1.5mm

1

BOKE Dimmable Constant Voltage LED Driver
MODEL: BK-DGV060-24V0D

INPUT: 200-240V ~ 0.35A Max. 50/60Hz λ : 0.95
 OUTPUT: 24V ~ 2.5A 60W Max.

For LED modules use only
www.bokedriver.com
 MADE IN CHINA

tc:90°C
 ta:60°C

Bottom

BOKE Drivers Co., Ltd.
 Address: 2nd and 3rd Floor, No.51, Xihuan 5th Road, South District,
 528455 Zhongshan City, Guangdong, CHINA

OUTPUT

- V+
- V-
- VCC
- GND
- DIM

SEC wire prep.
0.75-2.5mm

VCC12V
1.2A max. prep.
0.5-2.0mm

0.8mm

SELV

FREE

ROHS

INPUT

- ACL
- ACN
- DA
- DA
- DA
- DA

push DIM+ (DA) / push DIM- (DA1)

FBI wire pins: 0.75 x 1.5mm

BOKE Dimmable Constant Voltage LED Driver
MODEL: BK-DGV060-48V0D
 INPUT: 200-240V ~ 0.35A Max. 50/60Hz λ: 0.95
 OUTPUT: 48V ~ 1.2A 57.6W Max.
 For LED modules use only
 www.bokedriver.com
 MADE IN CHINA

OUTPUT

- V+
- V-
- VCC
- GND
- DIM

SEC wire pins: 0.75 x 1.5mm

VCC1IN: 1.20A MAX.
 SEC wire pins: 0.5 x 1.0mm

BOKE Drivers Co., Ltd.
 Address: 2nd and 3rd Floor, No.51, Xihuan 5th Road, South District,
 528455, Zhongshan City, Guangdong, CHINA

DGV100

INPUT

- ☐ ACL
- ☐ ACN
- ☐ DA
- ☐ DA
- ☐ DA
- ☐ DA

pushDHT 

PRI wire prep.
0.75-1.5mm²

0.5mm



BOKE Dimmable Constant Voltage LED Driver
MODEL: BK-DGV100-24V0D

INPUT: 200-240V ~ 0.65A Max. 50/60Hz λ: 0.95
 OUTPUT: 24V ~ 4.2A 100W Max.

For LED modules use only
www.bokedrivers.com
 MADE IN CHINA

tc: 95°C
 ta: 60°C

• tc

BOKE Drivers Co., Ltd.
 Address: 2nd and 3rd Floor, No. 51, Xihuian 5th Road, South District, 528455 Zhongshan City, Guangdong, CHINA













SEC wire prep.
0.75-2.5mm²

VCC+12V
2.2W MAX.

SEC wire prep.
0.5-1.5mm²

0.5mm

OUTPUT

- ☐ V+
- ☐ V-
- ☐ VCC
- ☐ GND
- ☐ DIM



INPUT

- ACL
- ACN
- DA
- DA
- DA
- DA

pushON L N DA DALI

PRI wire prep. 0.75-1.5mm²

SEC wire prep. 0.5-1.0mm²

FEATURES

- Dimmable Constant Voltage LED Driver
- MODEL: BK-DGV100-48V0D
- INPUT: 200-240V ~ 0.65A Max. 50/60Hz λ: 0.95
- OUTPUT: 48V ~ 2.09A 100W Max.
- For LED modules use only
- www.bokedriver.com
- MADE IN CHINA

tc: 95°C
ta: 60°C • tc

BOKE Drivers Co., Ltd.
Address: 2nd and 3rd Floor, No. 51, Xihuian 5th Road, South District, 528455 Zhongshan City, Guangdong, CHINA

SAFETY & COMPLIANCE

- 25 TÜV
- UKCA
- CE
- SELV
- FLICKER FREE
- RoHS

OUTPUT

- V+
- V-
- VCC
- GND
- DIM

SEC wire prep. 0.5-1.0mm²

VCC 12V 1.2W MAX.

SEC wire prep. 0.5-1.0mm²

DGV150

INPUT

- ☐ ACL
- ☐ ACN
- ☐ DA
- ☐ DA
- ☐ ⚡

push DIM

P8: wire prep. 0.75-1.0mm

BOKE Dimmable Constant Voltage LED Driver
MODEL: BK-DGV150-24VD

INPUT: 200-240V ~ 1A Max. 50/60Hz λ: 0.95
 OUTPUT: 24V = 6.25A 150W Max.
 For LED modules use only
www.bokedriver.com
 MADE IN CHINA

• tc: 90°C
 ta: 60°C

BOKE Drivers Co., Ltd.
 Address: 2nd and 3rd Floor, No. 51, Xiyuan 5th Road, South District, 528455 Zhongshan City, Guangdong, CHINA

SEC wire prep. 0.5-2.0mm


VCC: 12V MAX. SEC wire prep. 0.5-1.0mm

OUTPUT


- ☐ V+ +
- ☐ V- -
- ☐ VCC +
- ☐ GND 0
- ☐ DIM 0

INPUT		Dimmable Constant Voltage LED Driver MODEL:BK-DGV150-48VD				OUTPUT	
☐ ACL		INPUT: 200-240V ~ 1A Max. 50/60Hz λ: 0.95		• tc		SEC wire prep.	V+ ○
☐ ACN		OUTPUT: 48V = 3.12A 150W Max.		tc:90°C		1.5~2.0mm	V- ○
☐ DA	pushDIM + -	For LED modules use only		ta:60°C		VCC: 12V 1.2W MAX.	VCC ○
☐ DA	PRI wire prep. 0.75~1.5mm	www.bokedriver.com				SEC wire prep. 0.5~1.0mm	GND ○
☐ ⊕	8-10mm	MADE IN CHINA		BOKE Drivers Co.,Ltd.		18-20mm	DIM ○
				Address: 3rd and 3rd Floor, No.51, Yibuan 5th Road, South District, 538455 Zhongshan City, Guangdong, CHINA			


Optional accessories



(Model: BK-BAS003A)

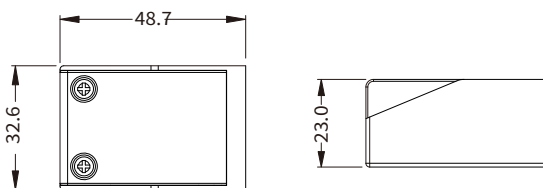

(Model: BK-BAS003B)

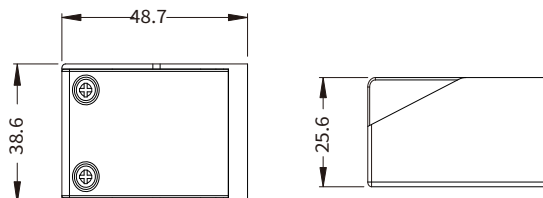


Remark: BK-BAS003A apply to DGV036/DGV060/DGV100
BK-BAS003B apply to DGV150


Unit:mm

Installation diagram of accessories

(Model: BK-BAS003A)

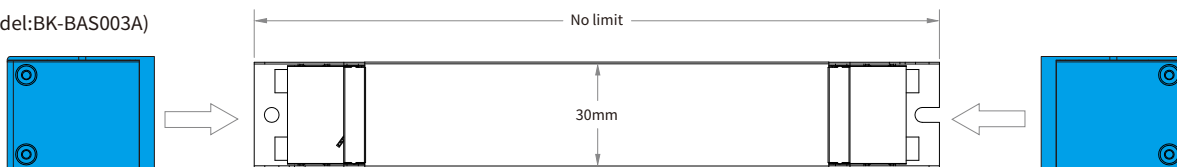

(Model: BK-BAS003B)

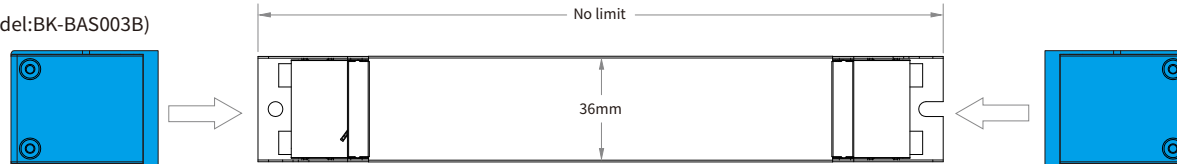

DALI dimming application

Wiring diagram



Switch to the DALI dimming mode

- After installation according to the wiring diagram of DALI dimming application, the driver will automatically switch to the DALI control mode after receiving any DALI command.

Remarks:

- Standard DALI control line voltage range: 9.5V to 22.5V, type 16V.
- The two DALI control lines polarity-reversible.
- Max. 64 DALI drivers per DALI control line.
- The maximum distance length of the DALI control line is 300m at $2 \times 1.5\text{mm}^2$.
- DALI bus can be wired together with any mains voltage cables, but separate wiring is recommended.
- The configuration parameters of the driver can be set through the DALI configuration tool or DALI application controller during installation, such as setting device address, group address, power-on level, bus-failure level, scene level, fade time, dimming curve, etc.

Please refer to the table below

Cable size	Distance
$2 \times 0.50\text{mm}^2$	max.100m
$2 \times 0.75\text{mm}^2$	max.150m
$2 \times 1.00\text{mm}^2$	max.200m
$\geq 2 \times 1.50\text{mm}^2$	max.300m


Power-on level :

When the driver is in DALI-2 dimming mode, the factory default level after each power-on is the brightest.

The power-on level can be set through the DALI configuration tool or DALI application controller during installation, and can be set to memory or fixed any brightness (such as off, darkest, 50%, etc.).

Note: The recommended setting for the default factory power-on level of the DALI-2 driver is the brightest in the DALI-2 standard.


Dimming curve

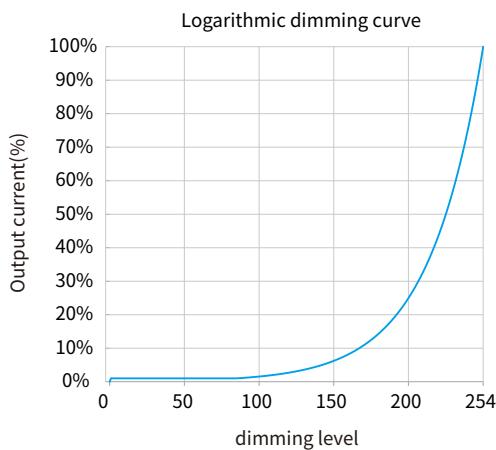

Remarks: The dimming curve can be selected by DALI configuration. The default is logarithmic dimming curve.

pushDIM dimming application

Wiring diagram

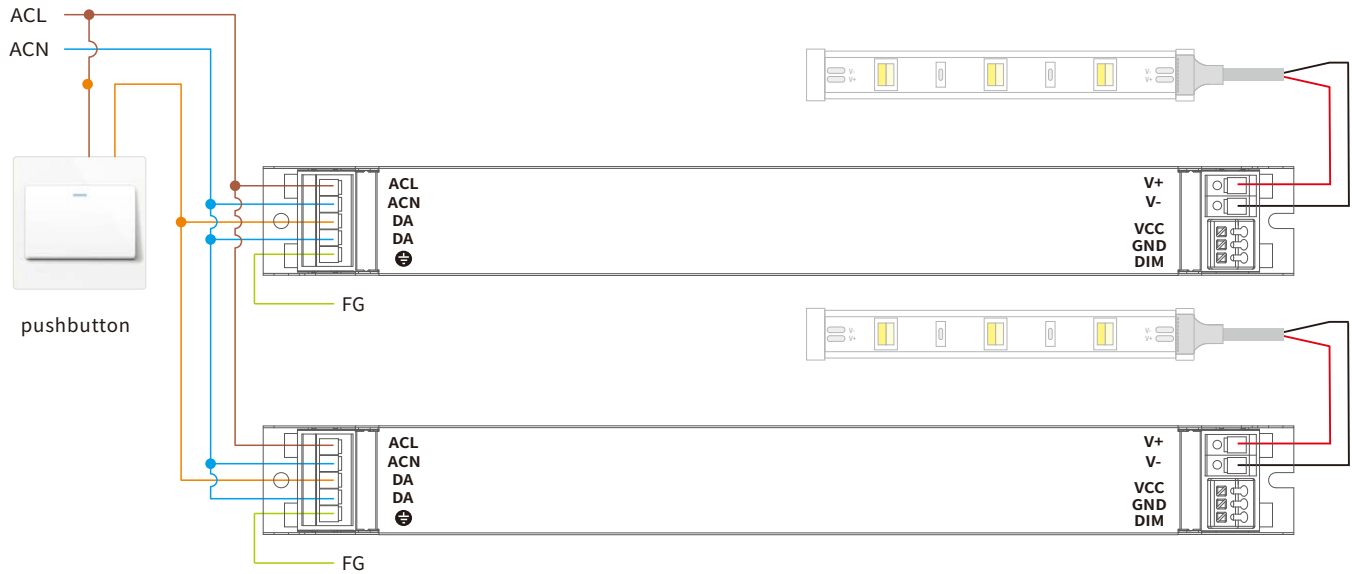

Switch to the pushDIM dimming mode

After installation according to the wiring diagram of pushDIM dimming application, long press the pushbutton 3 times ,then the driver will automatically switch to the pushDIM dimming mode.

Remarks:

Max. 50 drivers per pushDIM control line.


Turn on or turn off:short press pushbutton for 0.2-1s.

Dimming: long press pushbutton for 1-5s.

Power on status: after power on,the light state will be the same as the lighting on state.

If the light is on before power on,the light will be on after power on again,brightness will be the same as the last lighting on brightness.

If the light is off before power off,the light will be off after power on again,short press the pushbutton,then the light will be on,the brightness will be the same as the last brightness.

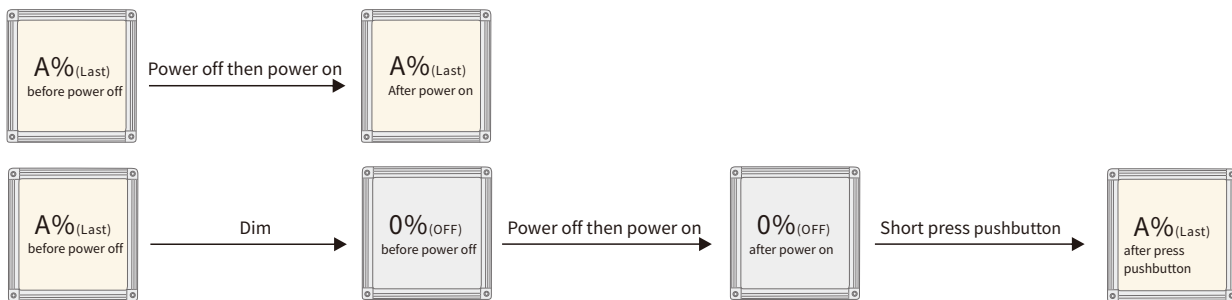

Multiple lights synchronize control operation

method 1:

Step 1:long press the pushbutton,confirm each light is on.

Step 2:short press the pushbutton,confirm each light is off.


Step 3:long press the pushbutton,confirm each light is from darkest to brightest and all the lights are synchronous.

method 2:

- Long press the pushbutton 15s,all lights output to the brightest state.

1-10V/10V PWM dimming application

Wiring diagram

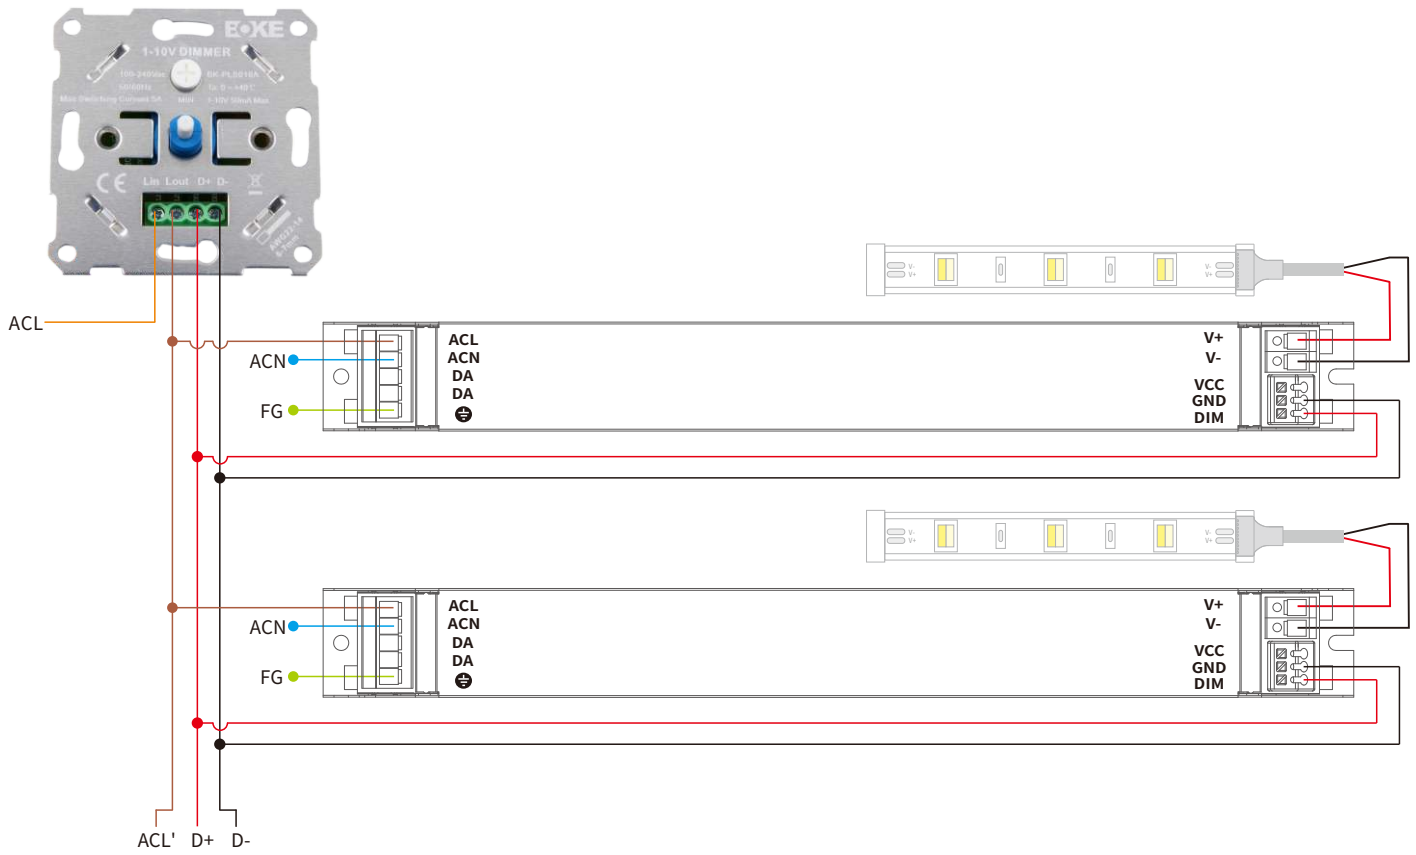



Switch to the 1-10V / 10V PWM dimming mode

- Method 1: After installation according to the wiring diagram of the 1-10V / 10V PWM dimming application, adjust the dimmer to the minimum and then to the maximum, the driver will automatically activate the 1-10V control mode.
- Method 2: Short-circuit the DIM+ and DIM- ports for 2s, the driver will automatically activate the 1-10V control mode.

Remarks


- Dimming interface characteristics: 0.9V and below are closed, 1V is the darkest, 10V is the brightest, 1-10V is the dimming range.
- The dimming interface distinguishes between positive and negative, DIM+ is positive, DIM- is negative, please do not reverse.
- Dimming interface does not support voltage access higher than 15V, otherwise it will cause damage to the internal components.
- When the dimming interface is open, the driver outputs the maximum current. When the interface is short-circuited, the current output is closed.
- When multiple synchronous dimming is required, the positive poles of the dimming interface of each driver are connected together, and the negative poles are connected together.
- Support passive dimmer or isolated active dimmer dimming, does not support non-isolated active dimmer dimming.
- In general, it is recommended that the number of mounted drives does not exceed 30pcs, and the wiring length does not exceed 100m.
- It is recommended that the dimming wires should not be lower than the 22AWG wire.
- Do not put the dimming wires with high voltage or interference sources. If it is unavoidable, please use the shielded wires.
- If you need a drive with 0-10V dimming characteristics, please contact BOKE.

Dimming curve

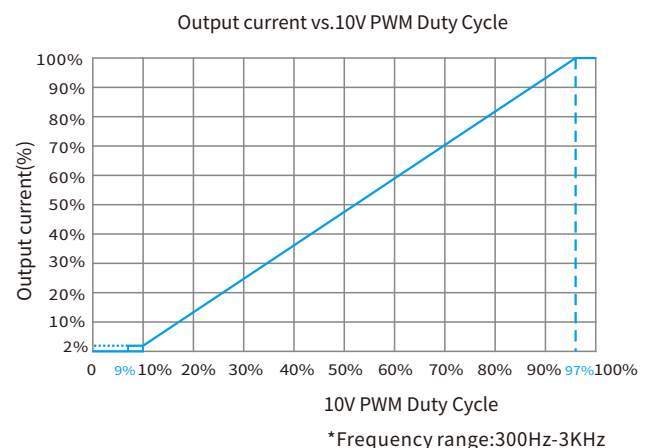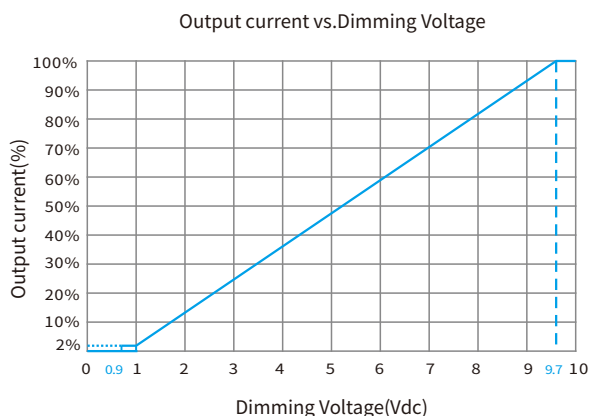

150K potentiometer dimming application


Wiring diagram

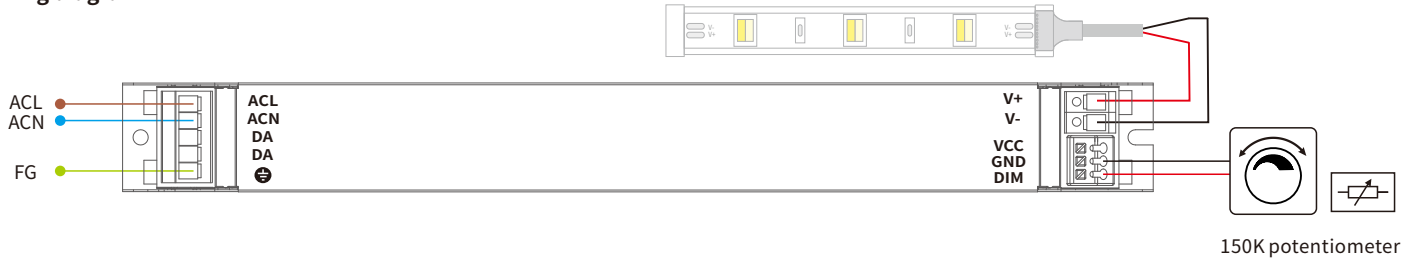

Remarks

- In the 150K potentiometer dimming mode, the potentiometer can only be connected to one driver.

Dimming curve

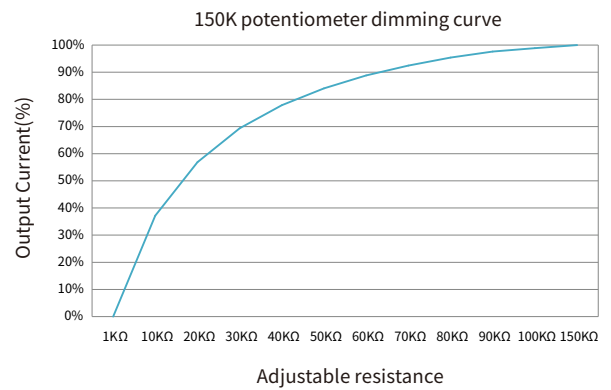

1-10V/10V PWM+12V dimming application

Wiring diagram



Electrical description

VCC: +12VDC $\pm 5\%$, 100mA MAX

PDIM: Voltage: 3.3-10V

Frequency range: 300Hz-3kHz

Phase position: positive logic

Duty cycle: 0%(OFF), 10%(darkest)~100%(brightest)

Typical applications


Aux supply 12V

Dimming PWM

GND

Bluetooth module
Zigbee module
WiFi module
LoRa module
4G/5G module
NB-IoT module
Daylight Sensor
PIR Sensor
Microwave Sensor
IR Sensor
RF module
.....

Dimming curve

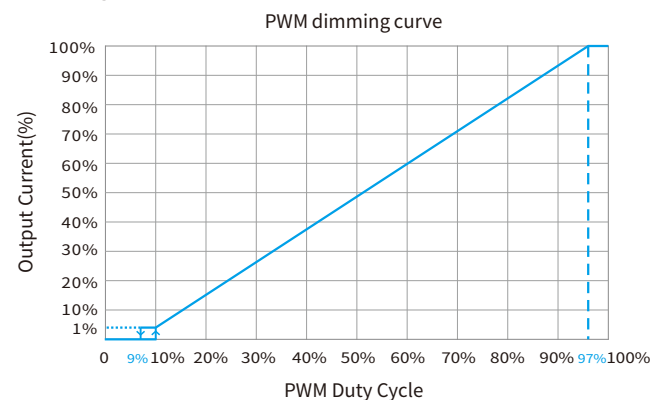


Mechanical Specification


Size(Excluding accessories)

Unit:mm


DGV036

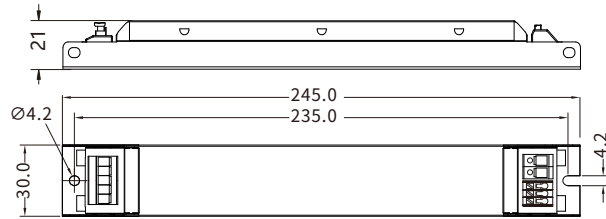

DGV060

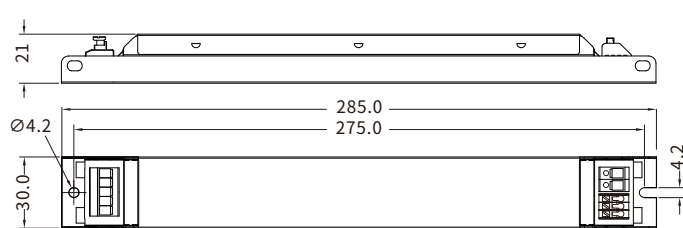

DGV100

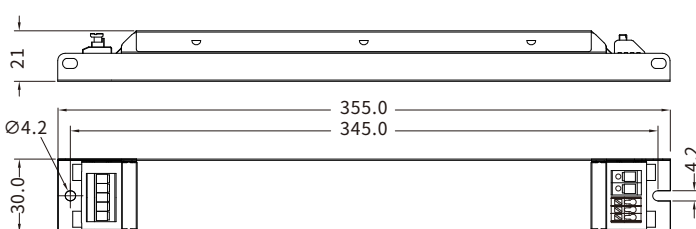

INPUT


Numbering	function	colour
1	ACL	orange
2	ACN	orange
3	DA	grey
4	DA	grey
5	FG	grey

Input wire

0.75-1.5mm²



DGV150

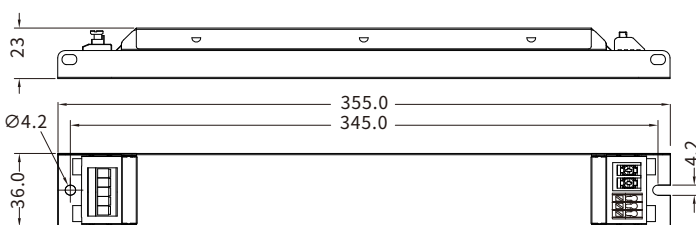


INPUT

Numbering	function	colour
1	ACL	orange
2	ACN	orange
3	DA	grey
4	DA	grey
5	FG	grey

Input wire

0.75-1.5mm²




Mechanical Specification


Size(Include accessories)

Unit:mm


DGV036

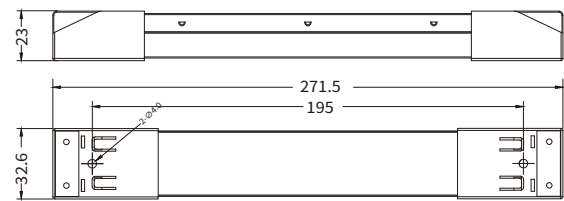

DGV060

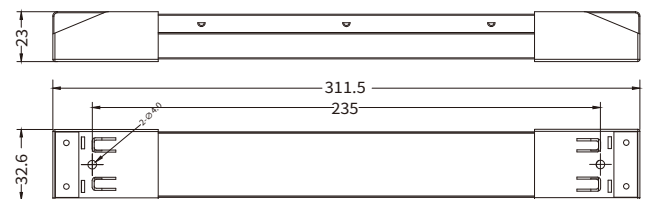


DGV100

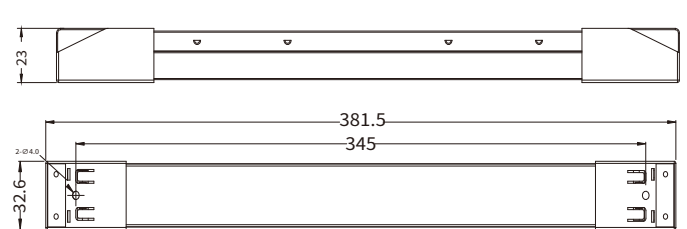

OUTPUT

Numbering	function	colour
1	V+	red
2	V-	black

Output wire
0.75-2.5mm²




DIMMING


Numbering	function	colour
1	VCC	red
2	GND	black
3	DIM	red

Dimming wire

0.5-1.0mm²



DGV150

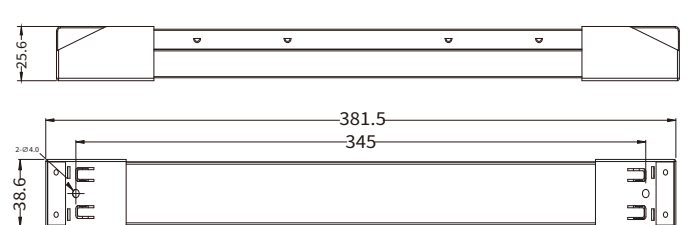


OUTPUT

Numbering	function
1	V+
2	V-

Output wire

1.5-2.0mm²




DIMMING


Numbering	function	colour
1	VCC	red
2	GND	black
3	DIM	red

Dimming wire


0.5-1.0mm²



Cold-pressed terminal reference



Cold-pressed terminal (bare part)



Cold-pressed terminal (Insulating part)

Product model	Position	Cable cord diameter	Cold-pressed Terminal			
			Model reference	Diameter		
				Inside diameter(d2)	Outside diameter(W)	Thickness(T)
DGV150	Output	0.2-0.5mm ²	RNB0.5-3.2	3.2mm	5mm	0.5mm
		0.5-1.5mm ²	SNB1.25-3.2/SV1.25-3		5.7mm	0.7mm
		1.5-2.5mm ²	SNB2-3.2/SV2-3			0.8mm

Installation note

Hot plug-in

- Hot plug-in is not supported due to residual output voltage of > 0 V.

Installation requirements

- The driver should be installed in a dry, acid-free, oil-free, fat-free environment.
- The installation ambient temperature of the driver shall not exceed the value of Ta at any time.
- The temperature of the mounting surface of the driver should be lower than the temperature of Ta.
- The driver should keep a certain distance from the heating stuff (such as the luminaire radiator).
- If the driver is used externally (it needs to be used with the accessories), the installation of the driver should also meet the following conditions:
 - 1.The driver should be a certain distance between the drivers, as shown in Figure 1.
 - 2.The driver keeps a certain distance from surrounding objects, as shown in Figure 2.

Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Mains leads should be kept apart from LED Driver and other leads (ideally 5-10 cm distance).
- Max. length of output wires is 2 m.
- Incorrect wiring can damage LED modules.

Replace LED module

1. Mains off
2. Wait more than 15 seconds
3. Remove LED module
4. Connect LED module again





Figure 1





Figure 2


Packaging

Optional 1: factory default

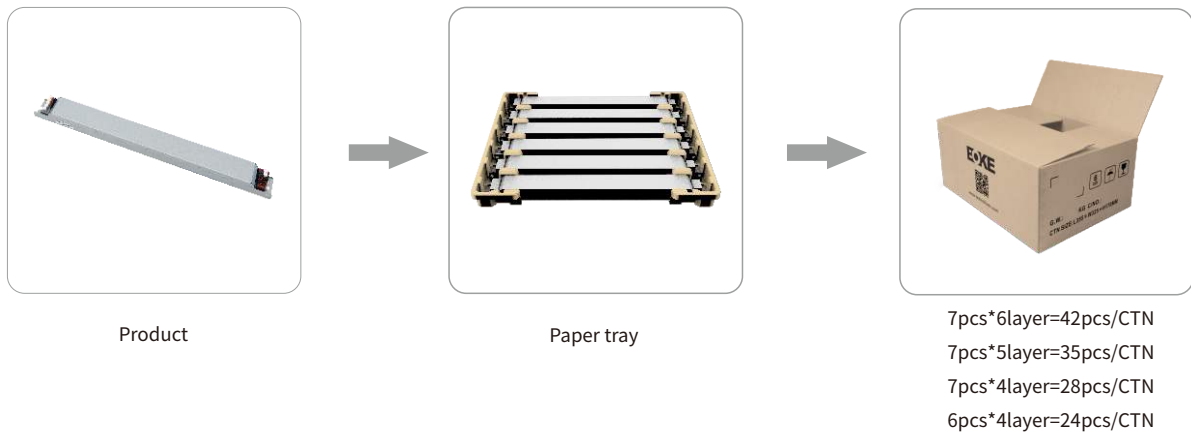

Model	Product size	Weight	Paper tray	Carton size	Qty/carton	N.W	G.W
DGV036	L245*W30*H21mm	168g	L340*W75*H29mm	L355*W285*H205mm	42pcs	7.06kg	8.66kg
DGV060	L285*W30*H21mm	248g	L340*W75*H29mm	L355*W325*H170mm	35pcs	8.68kg	10.0kg
DGV100	L355*W30*H21mm	307g	L340*W75*H29mm	L395*W355*H140mm	28pcs	8.60kg	9.75kg
DGV150	L355*W36*H23mm	415g	L340*W75*H33mm	L395*W355*H160mm	24pcs	9.96kg	11.2kg

Optional 2:

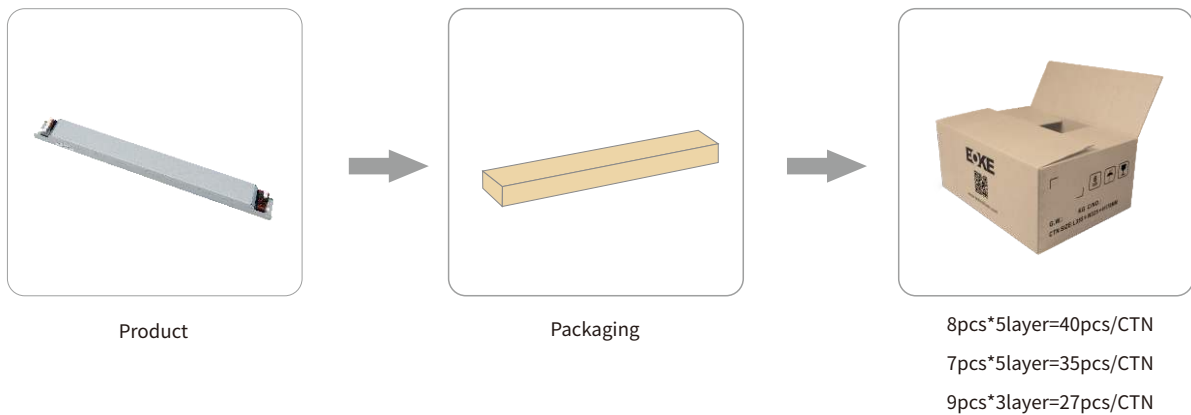


Model	Product size	Weight	Packaging size	Carton size	Qty/carton	N.W	G.W
DGV036	L245*W30*H21mm	168g	L280*W40*H30mm	L345*W300*H175mm	40pcs	6.72kg	7.99kg
DGV060	L285*W30*H21mm	248g	L320*W40*H30mm	L345*W300*H175mm	35pcs	8.68kg	10.5kg
DGV100	L355*W30*H21mm	307g	L390*W40*H30mm	L410*W285*H155mm	27pcs	8.29kg	10.2kg
DGV150	L355*W36*H23mm	415g	L390*W43*H30mm	L410*W285*H155mm	27pcs	11.21kg	13.3kg

Additional information

1. The life and MTBF of the product are for reference only, and do not represent a warranty statement.
2. For more information, please send an email to info@bokedriver.com.

Accessories

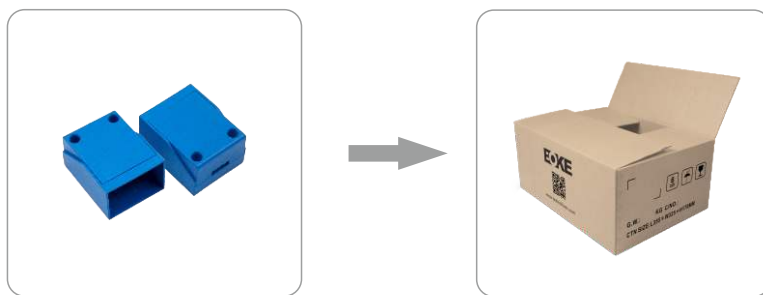

End cap + screws

100 sets/CTN

Model	Product size	Weight	Carton size	Qty/carton	N.W	G.W
BAS003A	L48.7*W32.6*H23mm	22g	L450*W350*H180mm	100 sets	2.2kg	2.7kg
BAS003B	L48.7*W38.6*H25.6mm	27g	L450*W350*H180mm	100 sets	2.7kg	3.2kg

Additional information

1. The life and MTBF of the product are for reference only, and do not represent a warranty statement.
2. For more information, please send an email to info@bokedriver.com.