



Dimmable | Wireless | System

BOKE Drivers Co.,Ltd.(head office)

Address: No.51,Xihuan Fifth Road, South District, Zhongshan,Guangdong,China
Tel: 86+0760 8839 3888
E-mail: info@bokedriver.com
Website: www.bokedriver.com

BOKE Europe Office

Address: Gimmersdorfer Str.76, 53343 Wachtberg, Deutschland
E-mail: alex.li@bokedriver.com
Website: www.bokedriver.com



Constant Voltage Lighting Drivers

DALI-2 DT8 DDV(S) Series 80/100/150/ 200/240W DALI2+pushDIM+pushCCT Dimming DALI&NFC Programmer Flicker-Free 2 Channels of CV Output Dimming Range 0.1-100%	DALI-2 DT8 DWV Series 100/150W DALI2+pushDIM+pushCCT Dimming 2 Channels of CV Output Flicker-Free Dimming Range 1-100%	DALI-2 DT8 DCV Series 80/150/200W DALI2+pushDIM+pushCCT Dimming 2 Channels of CV Output Flicker-Free Dimming Range 1-100%
DALI-2 DT6+12V DGV Series 36/60/100/150W DALI2+pushDIM Dimming 1-10V/10V PWM/Rx Dimming 12V Auxiliary Power Optional DC 24/48V CV Output Flicker-Free Dimming Range 1-100%	DALI-2 DT6+12V DGV(S) Series 36/60/120W DALI2+pushDIM Dimming 1-10V/10V PWM/Rx Dimming 12V Auxiliary Power DC 12V CV Output Input Voltage: 110-277V Flicker-Free Dimming Range 0.1-100%	DALI-2 DT6+12V DEV Series 80/150/200W DALI2+pushDIM Dimming 12V Auxiliary Power Flicker-Free Dimming Range 1-100%
DALI-2 DT6 DBV(S) Series 80/100/150/ 200/240W DALI2+pushDIM Dimming Energy Data (Part 251-253) DALI&NFC Programmer Flicker-Free Dimming Range 0.1-100%	DALI-2 DT6 DMV Series 60/100/150/ 250/340W DALI2+pushDIM Dimming IP67 Aluminum Metal Shell Design Flicker-Free Dimming Range 0.1-100%	1-10V+12V MGV Series 36/60/100/150W 1-10V/10V PWM/Rx Dimming 12V Auxiliary Power Flicker-Free Dimming Range 1-100%
1-10V+12V MEV Series 80/150/200W 1-10V/10V PWM/Rx Dimming 12V Auxiliary Power Optional DC 24/48V CV Output Flicker-Free Dimming Range 1-100%	On/off HGV(B) Series 80/100/120/150/ 200/250W Optional DC 24/48V CV Output Flicker-Free	On/off HGV(E) Series 100/150W Optional DC 24/48V CV Output Flicker-Free
On/off HEV Series 80/150/200W Optional DC 24/48V CV Output Flicker-Free	On/off HMV Series 20/24/30/36/48/ 60/72/100/150W IP67 Aluminum Metal Shell Design Flicker-Free	On/off PGV Series 20/24/30/36/48/ 60/72/100/150W Optional DC 12/24/48V CV Output Two-Stage And Isolation Flicker-Free Ultra-Thin Appearance

Programming Kit

The drivers and other devices support programming via DALI interface or NFC interface. The programmable items include adjusting output current (AOC), corridor dimming (CorridorDIM), constant light output (CLO), emergency lighting (EL), DALI address/group, DALI general parameters, and scenes, etc., to achieve flexible configuration and adapt to various application requirements. Programming is implemented through an NFC programmer or a DALI programmer and programming software (EasySet).

Programmer

Programming Software
BOKE EasySet
(APP/PC/Wechat applet)

NFC Batch Programmer
RF-LRM1002-300/
300 kit

NFC Programmer
ID ISC-PRH101-USB

Bluetooth NFC Programmer
ID ECCO Smart
HF-BLE

NFC Programmer
CPR30+

DALI Programmer
BK-CS01-SDL

Programming items

PDI Product Information Sheet	AOC Output Current Setting	1-10V 1-10V Dimming	PUSH PUSH Dimming	HPP Hot Swap Protection	CLO Light Decay Compensation	CORR Corridor Dimming
EL Direct Current Emergency	POF Power on Gradient	RT Runtime	DA DALI Address	DP DALI Basic Parameters	DS DALI Scene	D4i DALI D4i

Programming software

BOKE EasySet(App)

BOKE EasySet(PC)

Software Download -

Note: When directly reading and writing to devices via NFC on a mobile phone, the mobile phone needs to have NFC functionality.

iPhone App Store

Android Google Play

Android BOKE Download From The Official Website

BOKE EasySet(PC)

Supports Windows 7/Windows 10/Windows 11, 32-bit/64-bit

Smart Lighting Control System for Buildings

Support PEDF (Photovoltaic, Energy Storage, Direct Current, Flexibility) applications

System Overview

HiScene is a comprehensive intelligent control system for indoor lighting applications. The system supports not only standard DALI wired and wireless devices, but also supports curtains, air conditioners, fresh air and other devices. The system supports small-scale to large-scale system control applications, supports off-network operation and remote debugging, supports multi-account and permission management, supports complex device linkage and rich logic functions. The system is very suitable for high-end office lighting, factory lighting, medical lighting, commercial lighting, health lighting, stadium lighting, museum lighting and other needs mass devices, local operation, stable and reliable application field.

System Features

- Small to very large scale (up to 100,000) applications
- Distributed and not affected by single point of failure
- Reliable and local network without external network
- Support DALI wired and DALI wireless devices
- Support curtains, air conditioners, fresh air, etc
- Support button, panel, sensor, touch screen, etc
- Automatic device search, replacement and status sync.
- Support device fault fast discovery and alarm
- Support device firmware and functions upgrade
- Support 4/6/8/10" touch screen and voice control
- Support mobile phone, tablet and Web platform
- Support panel, scene, timing, trigger, rhythm control, etc
- Support the large-screen display of project data
- Support energy consumption statistics and analysis
- Large-scale device linkage and rich intelligent logics
- Support remote debugging without going to the site
- Multiple accounts and rich permission management
- Cloud server or local server are available
- Room, floor and building control scale are applicable
- Easy integration into BMS control systems via modbus...

Control Strategy

Lighting Control

Curtain Control

Air Conditioning

Panel Control

Timing Control

Scene control

Grouping control

Sensor Control

Lux Control

Rhythm Control

Screen Control

Site Management

Multi Platform

Energy Report

Third-Party system

BMS/BAS access

Management Platform

PC(Web)
(Window/macOS/Linux/HarmonyOS)

Tablet(App)
(IOS/Android/HarmonyOS)

Phone(App)
(IOS/Android/HarmonyOS)

System Equipment

System Devices

BK-DGES01-SGE
Smart Gateway(1CH)

BK-DGES02-SGE
Smart Gateway(3CH)

BK-DBPS01
Bus Power supply

BK-BEV024-12/24V0
DIN CV Driver

Smart Sensor

BK-ZSMS-P01
Multi-Sensor
(Motion+Lux)

BK-ZSMS-P02
Multi-Sensor
(Motion+Lux)

BK-ZSMS-P02S
Multi-Sensor
(Motion+Lux)

BK-DSLS-Z01
Lux Sensor
(Zhaga Book 18)

Smart Actuator

BK-DASS-A0110
1-CH Actuator
(10A)

BK-DASS-A0410/16/20
4-CH Actuator
(10/16/20A)

BK-DASS-A0810/16/20
8-CH actuator
(10/16/20A)

BK-DASS-A04AN
4-CH Dimming Actuator
(0/1-10V)

Smart Panel

BK-DPRS-W01
Knob Panel

BK-DPBS-B01XX
Button Panel (B01)

BK-DPBS-B02XX
Button Panel (B02)

BK-DPBS-B03XX
Button Panel (B03)

Touch screen

BK-DPBS-TB01
Button Screen (TB1)

BK-DPTS-M4
Touch Screen (4")

BK-DPTS-M10
Touch Screen (6")

BK-DPTS-M20
Touch Screen (8")


HVAC control

BK-DPTS-S10
Touch Screen (10")

BK-RAAS-ZB25
Air Conditioning Gateway

BK-RAAS-ZB19
Air Conditioning Gateway Pro

Curtain Motor (RS485)

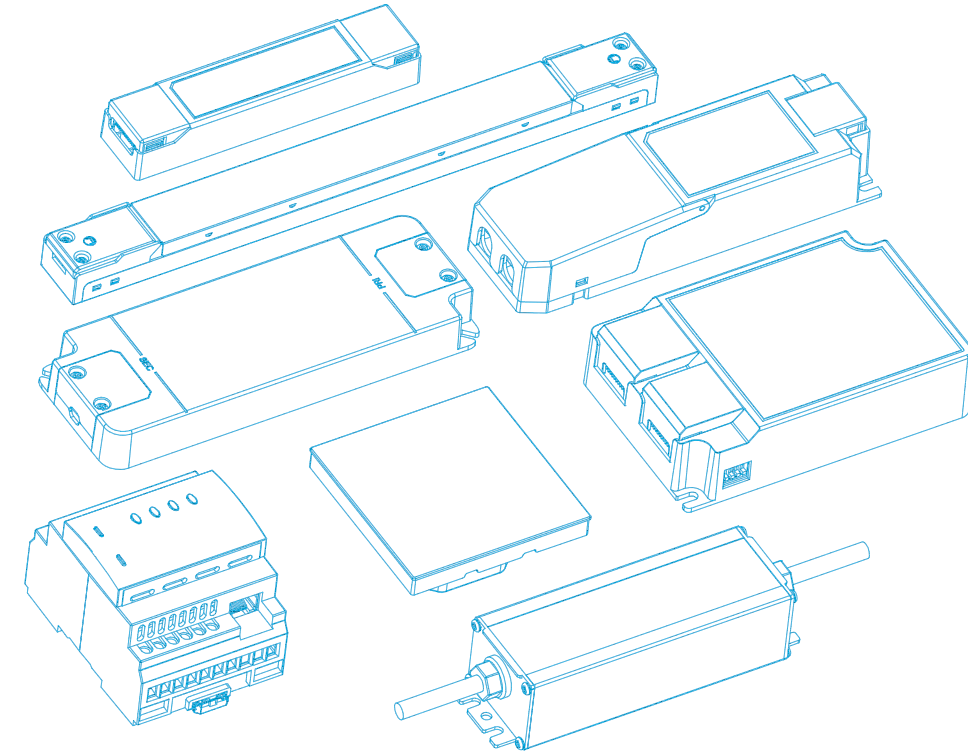

Engineering power supply
Engineering systems

Top choice BOKE
Top choice BOKE

User Selection Guide | 2025-Q4

