


Constant current independent driver

PSL Series suffix S

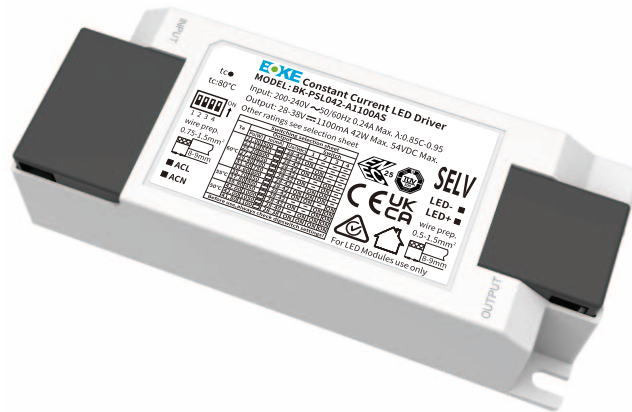

Features

- Multi-level current output can be realized by DIP-switch
- Flicker-free output, which meets the requirement of ErP standard
- Two-stage and isolation, more stable and safer
- Withstand 380VAC high voltage short-time shock
- Mains surge capability up to 2KV
- Screw-free design, easy wiring
- High PF, high efficiency
- Pushable strain relief design, easy to crimp and install
- Compact housing design
- SELV and Class II design, suitable for use outside of the luminaires
- Passed CE, ENEC, UKCA, RCM, CCC and other certifications
- Nominal life-time up to 100,000 h
- 5.5-year guarantee

Functions

- Protective features
(short-circuit, no-load protection)


Suitable for lights

- Suitable for lights with independent drivers such as downlights, spotlights, panel lights, etc
- It is necessary to evaluate the chamber temperature of the light when it is used in the built-in

Typical applications

- LED educational lighting
- LED indoor lighting
- LED office lighting
- LED commercial lighting

Model coding rules of PSL series

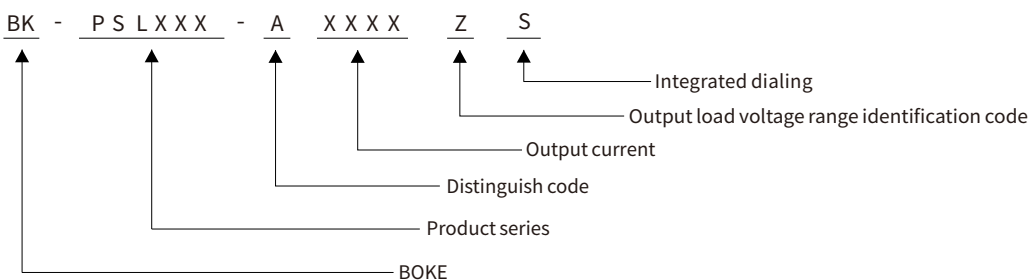



Model list

Model	Input voltage	Output power	Output voltage	Output current	Dimension
BK-PSL022-A0500AS	200-240VAC	21W MAX.	28-42VDC	0.3-0.5A	L117*W45.5*H29mm
BK-PSL042-A1100AS	200-240VAC	42W MAX.	28-42VDC	0.5-1.1A	L117*W45.5*H29mm

Technical data

Product model	BK-PSL022-A0500AS
Output parameters	
Regulation method	Constant Current
Rated output current range	0.3-0.5A, see the DIP-switch for details
Rated output voltage range	28-42VDC, see the DIP-switch for details
Rated output power	21W Max, see the DIP-switch for details
Output current adjustment	DIP S.W(5 levels)
Output current ripple LF	±2%
Output current accuracy	±5%
Linear regulation	±5%
Load regulation	±5%
No load output voltage	54VDC
Flicker-free(typical)	Flickering percent(IEEE 1789)=0.215%(100Hz), Flicker index(IEEE 1789)=0.001(100Hz), Pst LM = 0.001, SVM = 0.007, (The above parameters are obtained from testing the panel lights)
Input parameters	
Rated input voltage range	200-240VAC
Input voltage range	180-264VAC
Input voltage shock	<380V AC
Input current	<0.12A (Rated input voltage)
Input frequency	50/60Hz
Input PF/Input DF(typical)	PF:0.96 ,DF:0.97 ,see the electrical values below for details
Input THD(typical)	10% ,see the electrical values below for details
Efficiency(typical)	91% ,see the electrical values below for details
In-rush current(typical)	9.7A peak ,254us duration(50 % Ipeak), see the description below for details
Start/Switchover/Turn off	<0.5s(AC start),<0.5s(DC start),<0.3s(AC/DC switchover),<0.5s(Turn off)
Switching cycles	> 100,000 switching cycles
Power consumption(typical)	Full load(Pin):23.1W, No load(Pno): N/A, On stand-by(Psb): N/A , Network stand-by(Pnet): N/A
Safety	
Withstand voltage	I/P-O/P:3750V AC
Mains surge capability	L-N:1KV(90°/270° , 5 times each with an interval of 60s)(Performance criterion:A), L-N:2KV(90°/270° , 5 times each with an interval of 60s)(Performance criterion:A)
Leakage current(typical)	0.4mA
Isolation resistance	I/P-O/P:100MΩ/500Vdc/25°C/70% RH
Control interface	
DALI dimming port	N/A
pushDIM dimming port	N/A
1-10V 3in1 dimming port	N/A
Dimming range	N/A
Dimming drive mode	N/A
Emergency support	
Central emergency system	Not Supported
Self-contained emergency	Not Supported
Environment & Life time	
Operating temperature	Ta=-20-60°C
Case temperature	Tc=80°C
Operating humidity	5-85% RH, non-condensing
Storage temp./humidity	-40-80°C, 5-85% RH, non-condensing
IP grade	IP20
MTBF	500,000H,MIL-HDBK-217F(25°C)
Life-time	Nominal life-time up to 100,000 h, see the description below for details
Vibration resistant	10~500Hz,5G 12min./1cycle,period for 72min. each along X,Y,Z axes
Acoustic Noise	<25dB(30cm, Normal operation)
Environmental protection	RoHS
Certifications and standards	
Certification	CE, ENEC, UKCA, RCM, CCC
Safety	GB/T 19510.1, GB/T 19510.213, EN61347-1, EN61347-2-13, EN62384
EMC	GB/T 17743 , GB17625.1, EN55015, EN61000-3-2 , EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547
DALI-2	N/A
EL	N/A
RF	N/A

Remarks

- 1.By default, all parameter are measured at 230VAC input, 50Hz, full load and 25°C of ambient temperature.
- 2.The driver can not be installed inside the light. when the driver is used with the light, the EMC of the whole light needs to be tested.

Technical data

Product model	BK-PSL042-A1100AS
Output parameters	
Regulation method	Constant Current
Rated output current range	0.5-1.1A, see the DIP-switch for details
Rated output voltage range	28-42VDC, see the DIP-switch for details
Rated output power	42W Max, see the DIP-switch for details
Output current adjustment	DIP S.W(13 levels)
Output current ripple LF	±2%
Output current accuracy	±5%
Linear regulation	±5%
Load regulation	±5%
No load output voltage	54VDC
Flicker-free(typical)	Flickering percent(IEEE 1789)=0.235%(100Hz), Flicker index(IEEE 1789)=0.001(100Hz), Pst LM = 0.011, SVM = 0.008, (The above parameters are obtained from testing the panel lights)
Input parameters	
Rated input voltage range	200-240VAC
Input voltage range	180-264VAC
Input voltage shock	<380V AC
Input current	<0.24A (Rated input voltage)
Input frequency	50/60Hz
Input PF/Input DF(typical)	PF:0.98 ,DF:0.98 ,see the electrical values below for details
Input THD(typical)	8.5% ,see the electrical values below for details
Efficiency(typical)	92.5% ,see the electrical values below for details
In-rush current(typical)	15.1A peak ,270us duration(50 % Ipeak), see the description below for details
Start/Switchover/Turn off	<0.5s(AC start), <0.5s(DC start), <0.3s(AC/DC switchover), <0.5s(Turn off)
Switching cycles	> 100,000 switching cycles
Power consumption(typical)	Full load(Pin):45.4W, No load(Pno): N/A, On stand-by(Psb): N/A , Network stand-by(Pnet): N/A
Safety	
Withstand voltage	I/P-O/P:3750V AC
Mains surge capability	L-N:1KV(90°/270° , 5 times each with an interval of 60s)(Performance criterion:A), L-N:2KV(90°/270° , 5 times each with an interval of 60s)(Performance criterion:A)
Leakage current(typical)	0.4mA
Isolation resistance	I/P-O/P:100MΩ/500Vdc/25°C/70% RH
Control interface	
DALI dimming port	N/A
pushDIM dimming port	N/A
1-10V 3in1 dimming port	N/A
Dimming range	N/A
Dimming drive mode	N/A
Emergency support	
Central emergency system	Not Supported
Self-contained emergency	Not Supported
Environment & Life time	
Operating temperature	Ta=-20-50/55/60°C, see the label below for details
Case temperature	Tc=80°C
Operating humidity	5-85% RH, non-condensing
Storage temp./humidity	-40-80°C, 5-85% RH, non-condensing
IP grade	IP20
MTBF	500,000H, MIL-HDBK-217F(25°C)
Life-time	Nominal life-time up to 100,000 h, see the description below for details
Vibration resistant	10~500Hz, 5G 12min./1cycle, period for 72min. each along X,Y,Z axes
Acoustic Noise	<25dB(30cm, Normal operation)
Environmental protection	RoHS
Certifications and standards	
Certification	CE, ENEC, UKCA, RCM, CCC
Safety	GB/T 19510.1, GB/T 19510.213, EN61347-1, EN61347-2-13, EN62384
EMC	GB/T 17743, GB17625.1, EN55015, EN61000-3-2, EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547
DALI-2	N/A
EL	N/A
RF	N/A


Remarks

- 1.By default, all parameter are measured at 230VAC input, 50Hz, full load and 25°C of ambient temperature.
- 2.The driver can not be installed inside the light. when the driver is used with the light, the EMC of the whole light needs to be tested.


Electrical values

BK-PSL022-A0500AS


Efficiency vs voltage

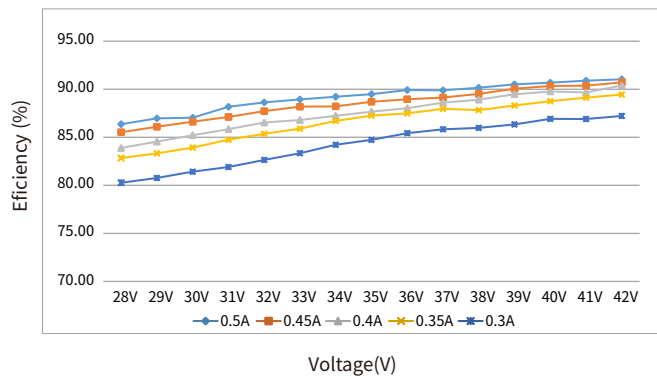


THD vs. voltage

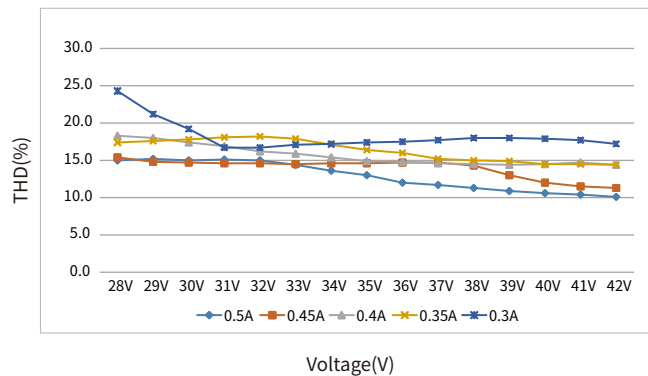

Power factor vs. voltage

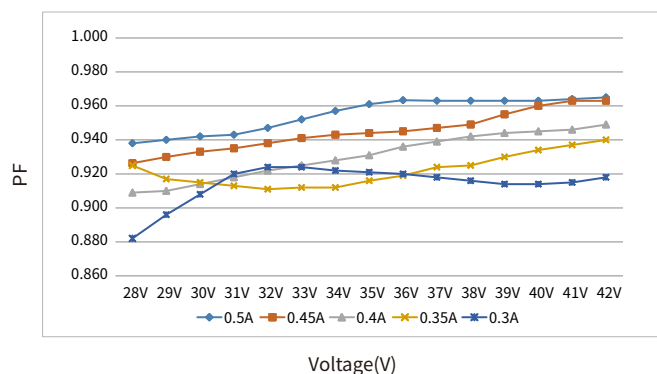


Displacement factor vs. voltage

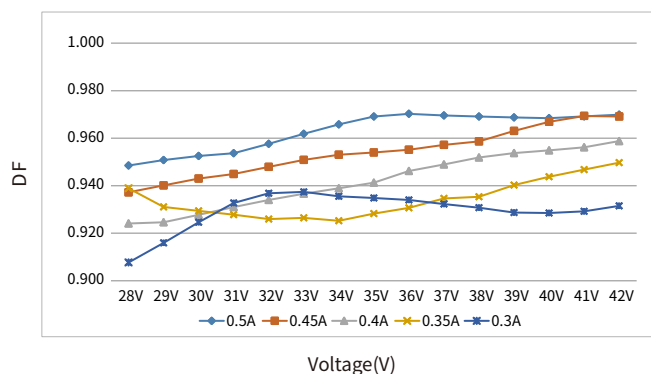

Expected life-time

Life-time vs. case temperature

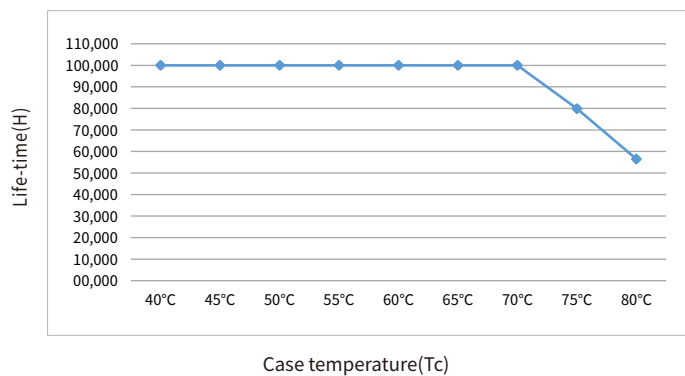


- The life-time of the LED driver is shown in the figure above (calculated based on the 90% survival rate).
- The relation of tc to ta temperature depends also on the luminaire design.


Electrical values

BK-PSL042-A1100AS


Efficiency vs voltage

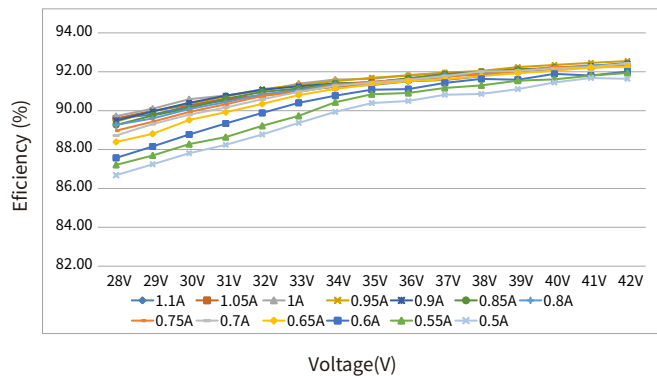


THD vs. voltage

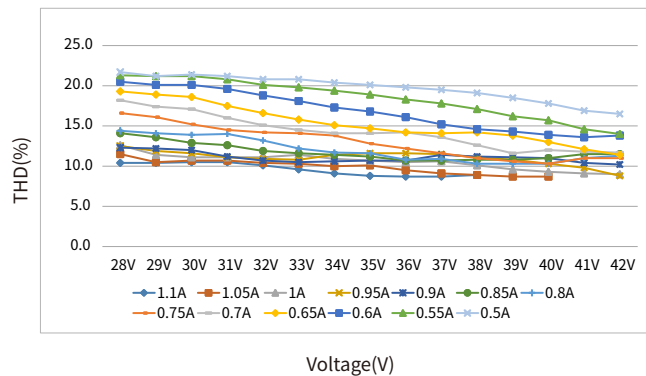

Power factor vs. voltage

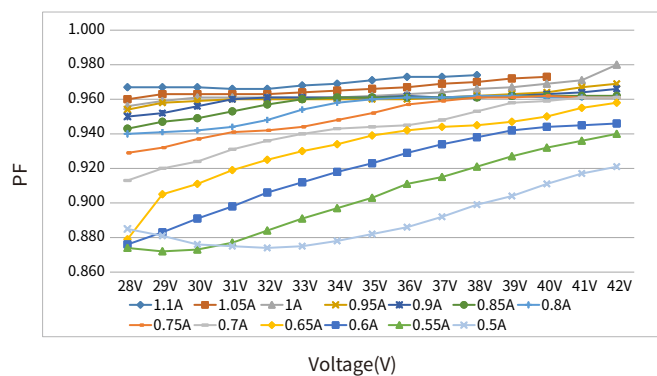


Displacement factor vs. voltage

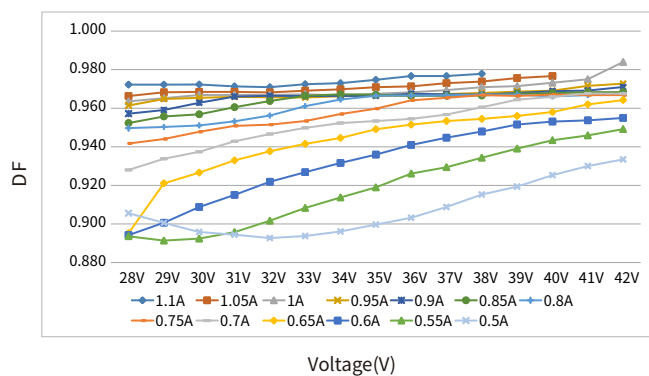

Expected life-time

Life-time vs. case temperature

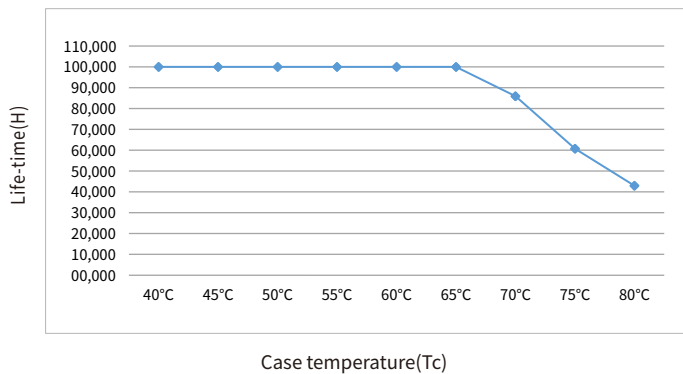


- The life-time of the LED driver is shown in the figure above (calculated based on the 90% survival rate).
- The relation of t_c to t_a temperature depends also on the luminaire design.

Surge

Model	Ipeak	Twidth	Condition	Relative number of MCB/pcs														
				B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20	D25
BK-PSL022-A0500AS	9.7A	254us	AC 230V, Full load, Cold start, Ta≤30°C, MCB is not installed side by side	28	37	45	56	71	47	61	75	94	118	77	100	124	155	193
BK-PSL042-A1100AS	15.1A	270us		17	22	27	34	42	28	36	45	56	70	39	51	63	79	98

Remarks

- The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
- Calculation uses typical values from ABB series S200 as a reference.
- Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.
- If the ambient temperature of the MCB installation exceeds 30°C or multiple MCBs are installed side by side, the number of drives mounted will be reduced and the calculation needs to be recalculated.
- Electrician's usually consider Type B for household lighting and Type C for commercial lighting application.

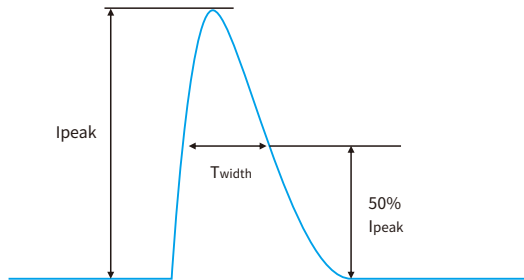

Functions

Output short-circuit behaviour

- Output short-circuit will not damage the driver.
- After removing the short circuit fault, the driver will automatically resume output.

Output no-load operation

- Output no-load will not damage the driver.
- Please turn off the driver first if you need to connect the LED load.

Insulation between circuits

Isolation	Input	Output	Case
Input	-	Double	Double
Output	Double	-	Basic
Case	Double	Basic	-

Label

BK-PSL022-A0500AS

BOKE Constant Current LED Driver
MODEL: BK-PSL022-A0500AS
 tc: 80°C
 ta: 60°C
 Input: 200-240V ~ 50/60Hz 0.12A Max. $\lambda: 0.85\text{C}-0.95$
 Output: 28-42V $\approx$ 500mA 21W Max. 54VDC Max.
 Other ratings see selection sheet
 For LED Modules use only

Switching selection sheet

Output	Switch	1	2	3	4
12.60 300	28-42	-	-	-	-
14.70 350	28-42	ON	-	-	-
16.80 400	28-42	-	ON	-	-
18.90 450	28-42	-	-	ON	-
21.00 500	28-42	-	-	-	ON

Before use, always check dipswitch settings!

SELV
 LED-
 LED+
 wire prep. 0.5-1.5mm²
 8-9mm

ACN

MADE IN CHINA
 www.bokedriver.com
 BOKE Drivers Co., Ltd.
 Address: 2nd and 3rd Floor, No.51,
 Xihuan 5th Road, South District,
 528455 Zhongshan City, Guangdong, CHINA
 For Australia and New Zealand, the marking label with

110/1000V
 FREE
 M
 M
 ROHS
 " "

BK-PSL042-A1100AS

BOKE Constant Current LED Driver
MODEL: BK-PSL042-A1100AS
 tc: 80°C
 Input: 200-240V ~ 50/60Hz 0.24A Max. $\lambda: 0.85\text{C}-0.95$
 Output: 28-38V $\approx$ 1100mA 42W Max. 54VDC Max.
 Other ratings see selection sheet
 For LED Modules use only

Switching selection sheet

Output	Switch	1	2	3	4
21.00 500	28-42	-	-	-	-
23.10 550	28-42	ON	-	-	-
25.20 600	28-42	-	ON	-	-
27.30 650	28-42	-	-	ON	-
29.40 700	28-42	-	-	-	ON
31.50 750	28-42	ON	ON	ON	ON
33.60 800	28-42	ON	ON	ON	ON
35.70 850	28-42	ON	ON	ON	ON
37.80 900	28-42	ON	ON	ON	ON
39.90 950	28-42	ON	ON	ON	ON
42.00 1000	28-42	ON	ON	ON	ON
44.10 1050	28-42	ON	ON	ON	ON
46.20 1100	28-38	ON	ON	ON	ON

Before use, always check dipswitch settings!

SELV
 LED-
 LED+
 wire prep. 0.5-1.5mm²
 8-9mm

ACN

MADE IN CHINA
 www.bokedriver.com
 BOKE Drivers Co., Ltd.
 Address: 2nd and 3rd Floor, No.51,
 Xihuan 5th Road, South District,
 528455 Zhongshan City, Guangdong, CHINA
 For Australia and New Zealand, the marking label with

110/1000V
 FREE
 M
 M
 ROHS
 " "

DIP-switch & output current

BK-PSL022-A0500AS

Output			1	2	3	4
Prated(w)	Irated(mA)	Voltage(Vdc)				
12.60	300	28-42	--	--	--	--
14.70	350	28-42	ON	--	--	--
16.80	400	28-42	--	ON	--	--
18.90	450	28-42	--	--	ON	--
21.00	500 ★	28-42	--	--	--	ON

BK-PSL042-A1100AS


Ta	Output			1	2	3	4
	Prated(w)	Irated(mA)	Voltage(Vdc)				
60°C	21.00	500	28-42	--	--	--	--
	23.10	550	28-42	ON	--	--	--
	25.20	600	28-42	--	ON	--	--
	27.30	650	28-42	ON	ON	--	--
	29.40	700	28-42	--	--	ON	--
	31.50	750	28-42	ON	--	ON	--
	33.60	800	28-42	--	ON	ON	--
55°C	35.70	850	28-42	ON	ON	ON	--
	37.80	900	28-42	ON	ON	--	ON
	39.90	950	28-42	--	--	ON	ON
50°C	42.00	1000	28-42	ON	--	ON	ON
	42.00	1050	28-40	--	ON	ON	ON
	41.80	1100 ★	28-38	ON	ON	ON	ON

Remarks:

- ★ It means that this item is the factory default current.
- It means that this channel is OFF.

Optional accessories (See the parts specification for details)

Optional 1: Wiring type




Model: BK-BAS010
Wiring type:
Loop-in and loop-out



Optional2: Pluggable connector type,5Pole(WAGO)



Model: BK-BAS010A
Pluggable connector type:
WAGO P/N:770-2115/007-000



Pluggable connector other side:
WAGO P/N:770-1105/022-000

Optional3: Pluggable connector type,5Pole(Wieland)



Model: BK-BAS010B
Pluggable connector type:
Wieland P/N:92.052.8658.0




Pluggable connector other side:
Wieland P/N:92.953.5453.0

Mechanical Specification

Size(Excluding accessories)

Unit:mm


PSL022-A/PSL042-A

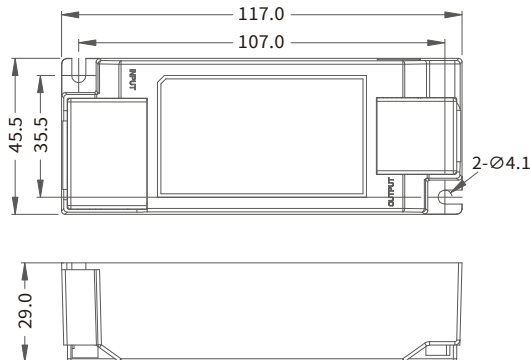

INPUT

Numbering	function	colour
1	ACL	orange
2	ACN	orange

Input wire




Mechanical Specification

Size(Include accessories)

Unit:mm


PSL022-A/PSL042-A

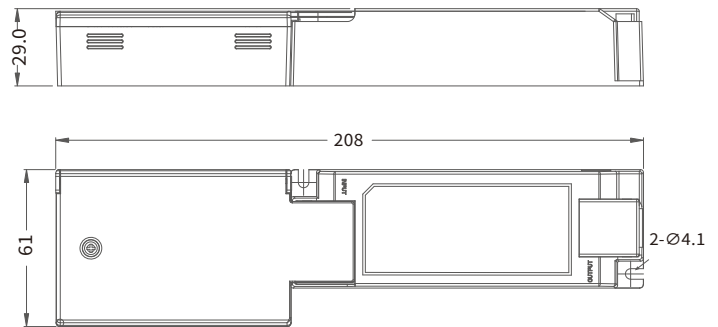

OUTPUT

Numbering	function	colour
1	LED-	black
2	LED+	red

Output wire



Installation note

Hot plug-in

- Hot plug-in is not supported due to residual output voltage of > 0 V.

Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Max. length of output wires is 2 m.
- Incorrect wiring can damage LED modules.

Installation requirements

- The driver should be installed in a dry, acid-free, oil-free, fat-free environment.
- The installation ambient temperature of the driver shall not exceed the value of Ta at any time.
- The temperature of the mounting surface of the driver should be lower than the temperature of Ta.
- The driver should keep a certain distance from the heating stuff (such as the lamp radiator).
- If the driver is used externally (it needs to be used with the power end cover), the installation of the driver should also meet the following conditions:
 - 1.The driver should be a certain distance between the drives, as shown in Figure 1.
 - 2.The driver keeps a certain distance from surrounding objects, as shown in Figure 2.

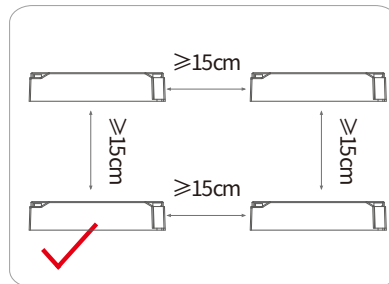
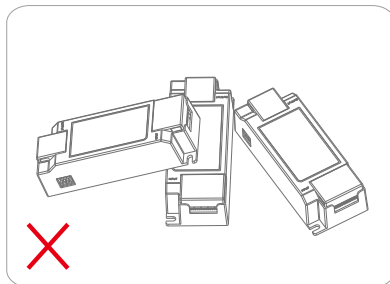


Figure 1

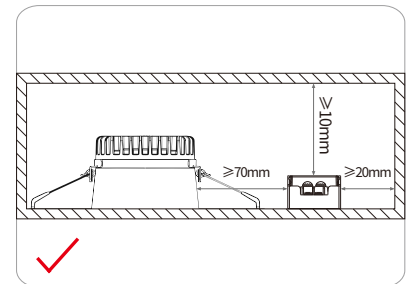



Figure 2

- ### Replace LED module

 1. Mains off
 2. Wait more than 5 seconds
 3. Remove LED module
 4. Connect LED module again

Packaging(Excluding accessories)

Optional 1: factory default

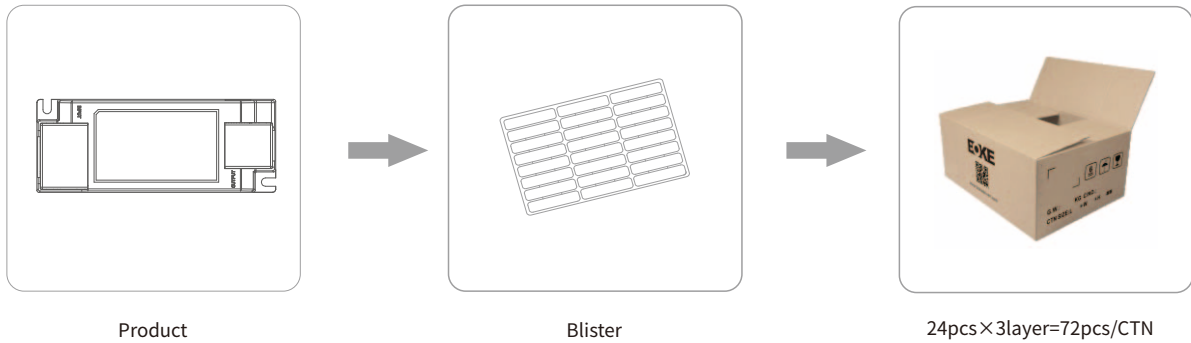

Model	Product size	Weight	Blister size	Carton size	Qty/carton	N.W	G.W
PSL022-A	L117*W45.5*H29mm	94g	L430*W340*H47mm	L450*W350*H180mm	72pcs	6.77kg	8.20kg
PSL042-A	L117*W45.5*H29mm	114g	L430*W340*H47mm	L450*W350*H180mm	72pcs	8.21kg	9.60kg

Optional 2:



Model	Product size	Weight	Packaging size	Carton size	Qty/carton	N.W	G.W
PSL022-A	L117*W45.5*H29mm	94g	L140*W35*H50mm	L345*W310*H170mm	54pcs	5.08kg	6.73kg
PSL042-A	L117*W45.5*H29mm	114g	L140*W35*H50mm	L345*W310*H170mm	54pcs	6.16kg	7.83kg

Additional information

1. This product can only be used outside the light body, Can not be used inside of the light, and it must be used within the specified working environment.
2. The life and MTBF of the product are for reference only, and do not represent a warranty statement.
3. For more information, please send an email to info@bokedriver.com.